

VETIVER SYSTEM TECHNOLOGY FOR PREVENTION AND TREATMENT OF POLLUTED WATER AND CONTAMINATED LAND

Paul Truong
TVNI Technical Director
Director for Asia and Oceania,
Brisbane, Australia
p.truong@veticon.com.au
paultruong@vetiver.org
www.vetiver.org

*All materials in this document remain the property of Veticon Consulting Pty Ltd.
Permission must be obtained for their use. Copyright © 2014*

INTRODUCTION

- **The Vetiver System (VS) is was first developed by the World Bank for soil and water conservation and now being used in over 100 countries for various applications.**
- **R&D conducted in several countries showed that vetiver grass is tolerant to the most adverse conditions: high in acidity, alkalinity, salinity and sodicity; heavy metal toxicities and also capable of take up large amount of nutrients in soil and water.**
- **Due to the above features VS has been used successfully for soil and water conservation in agricultural lands, infrastructure and environmental protection in Australia, Africa, Asia, North and South America and southern Europe.**



SPECIAL FEATURES OF VETIVER GRASS SUITABLE FOR WASTEWATER DISPOSAL AND TREATMENT

UNIQUE ATTRIBUTES

Stiff and erect stems up to 2m tall and over 2.5m with flower head. It flowers but setting no seeds.

Forming a thick hedge when planted in row which can spread and slow down runoff water

UNIQUE ATTRIBUTES



DEEP, EXTENSIVE AND PENETRATING ROOT SYSTEM

China: One year old with 3.3m deep root system

Vietnam: Agriculture & Forestry University, Saigon






Growing vigorously in water in Australia and China. Vetiver can survive more than 50 days when completely submerged.

Extremely drought tolerant in central Australia, note all native grasses were brown off



HIGHLY SALT TOLERANT

Saline threshold level is at $EC_e=8 \text{ dsm}^{-1}$, and vetiver can survive at 47.5 dsm^{-1} under dryland salinity conditions

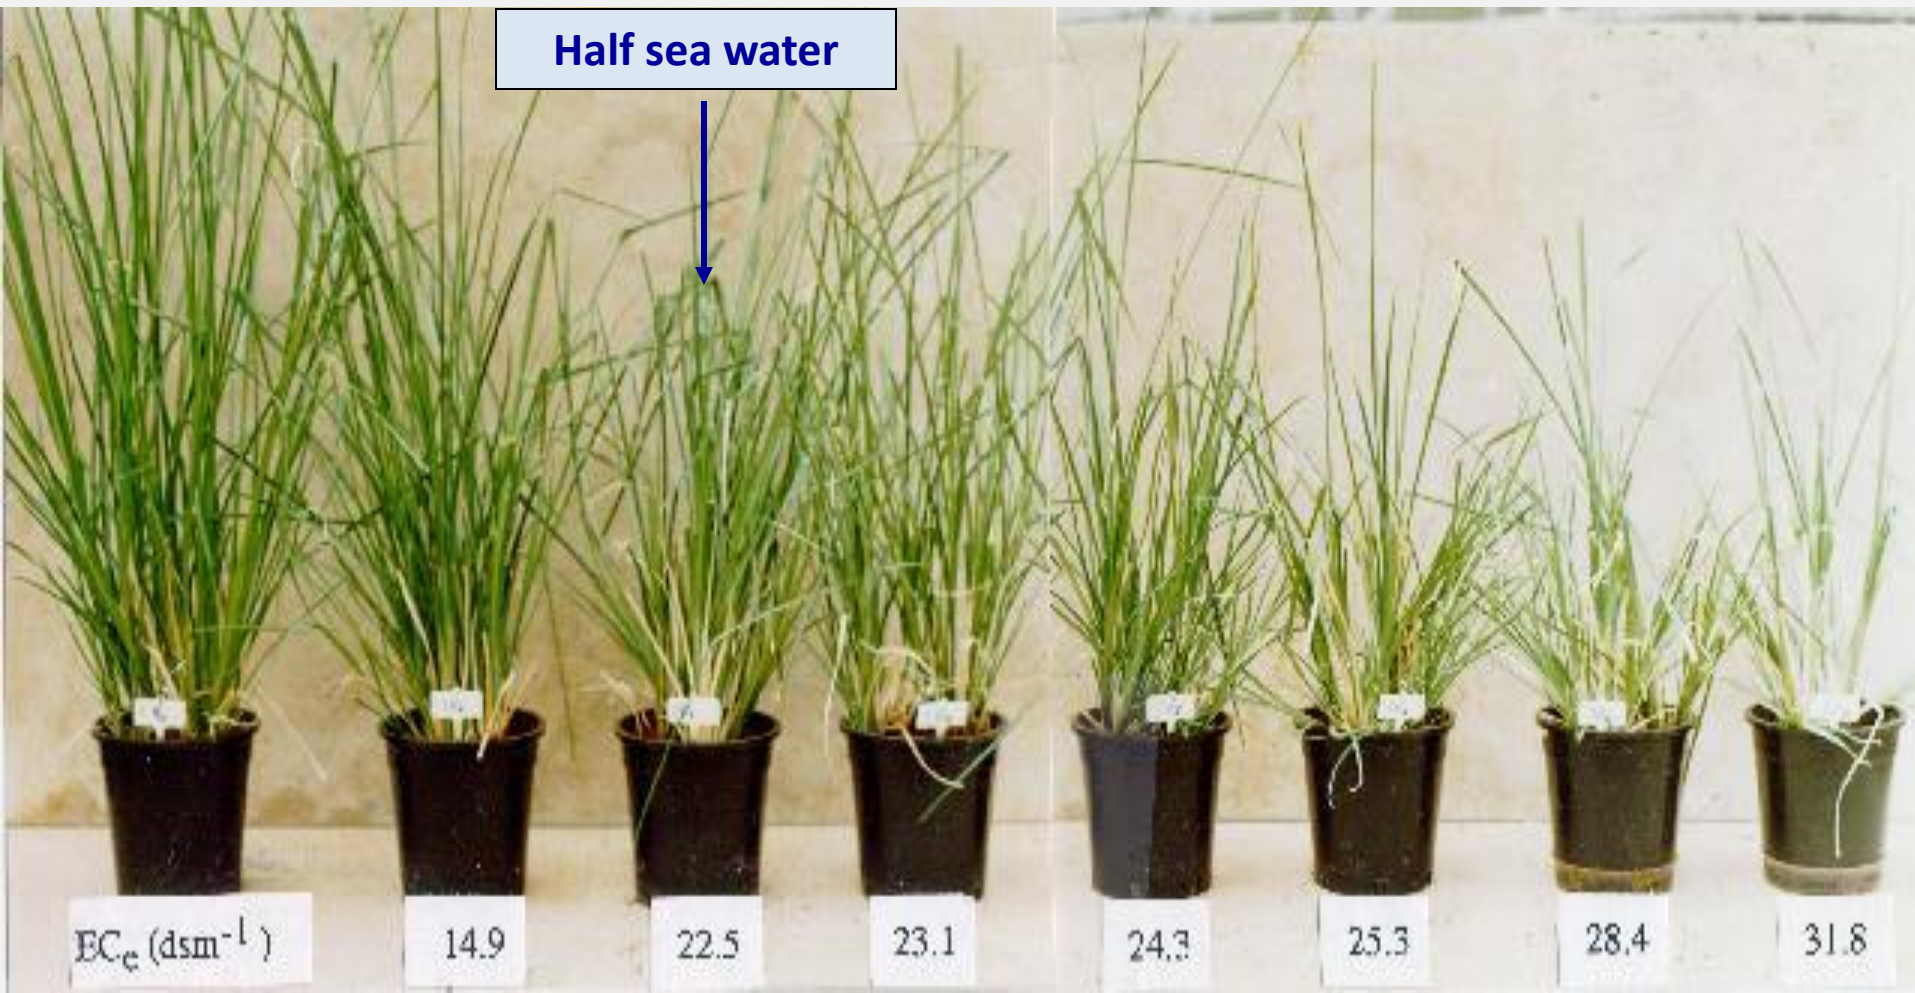



**Heavy cracking clay in
Australia**

**Coastal dune in
Vietnam**



HIGH N AND P REMOVAL: With high capacity of removing N and P in polluted water, vetiver cleaned up blue green algae in 4 days


Sewage effluent infested with Blue-Green algae due to high Nitrate (100mg/L) and high Phosphate (10mg/L)

Same effluent after 4 days after treating with vetiver, reducing N level to 6mg/L (94%) and P to 1mg/L (90%)


UNIQUE ATTRIBUTES



NITROGEN UPTAKE


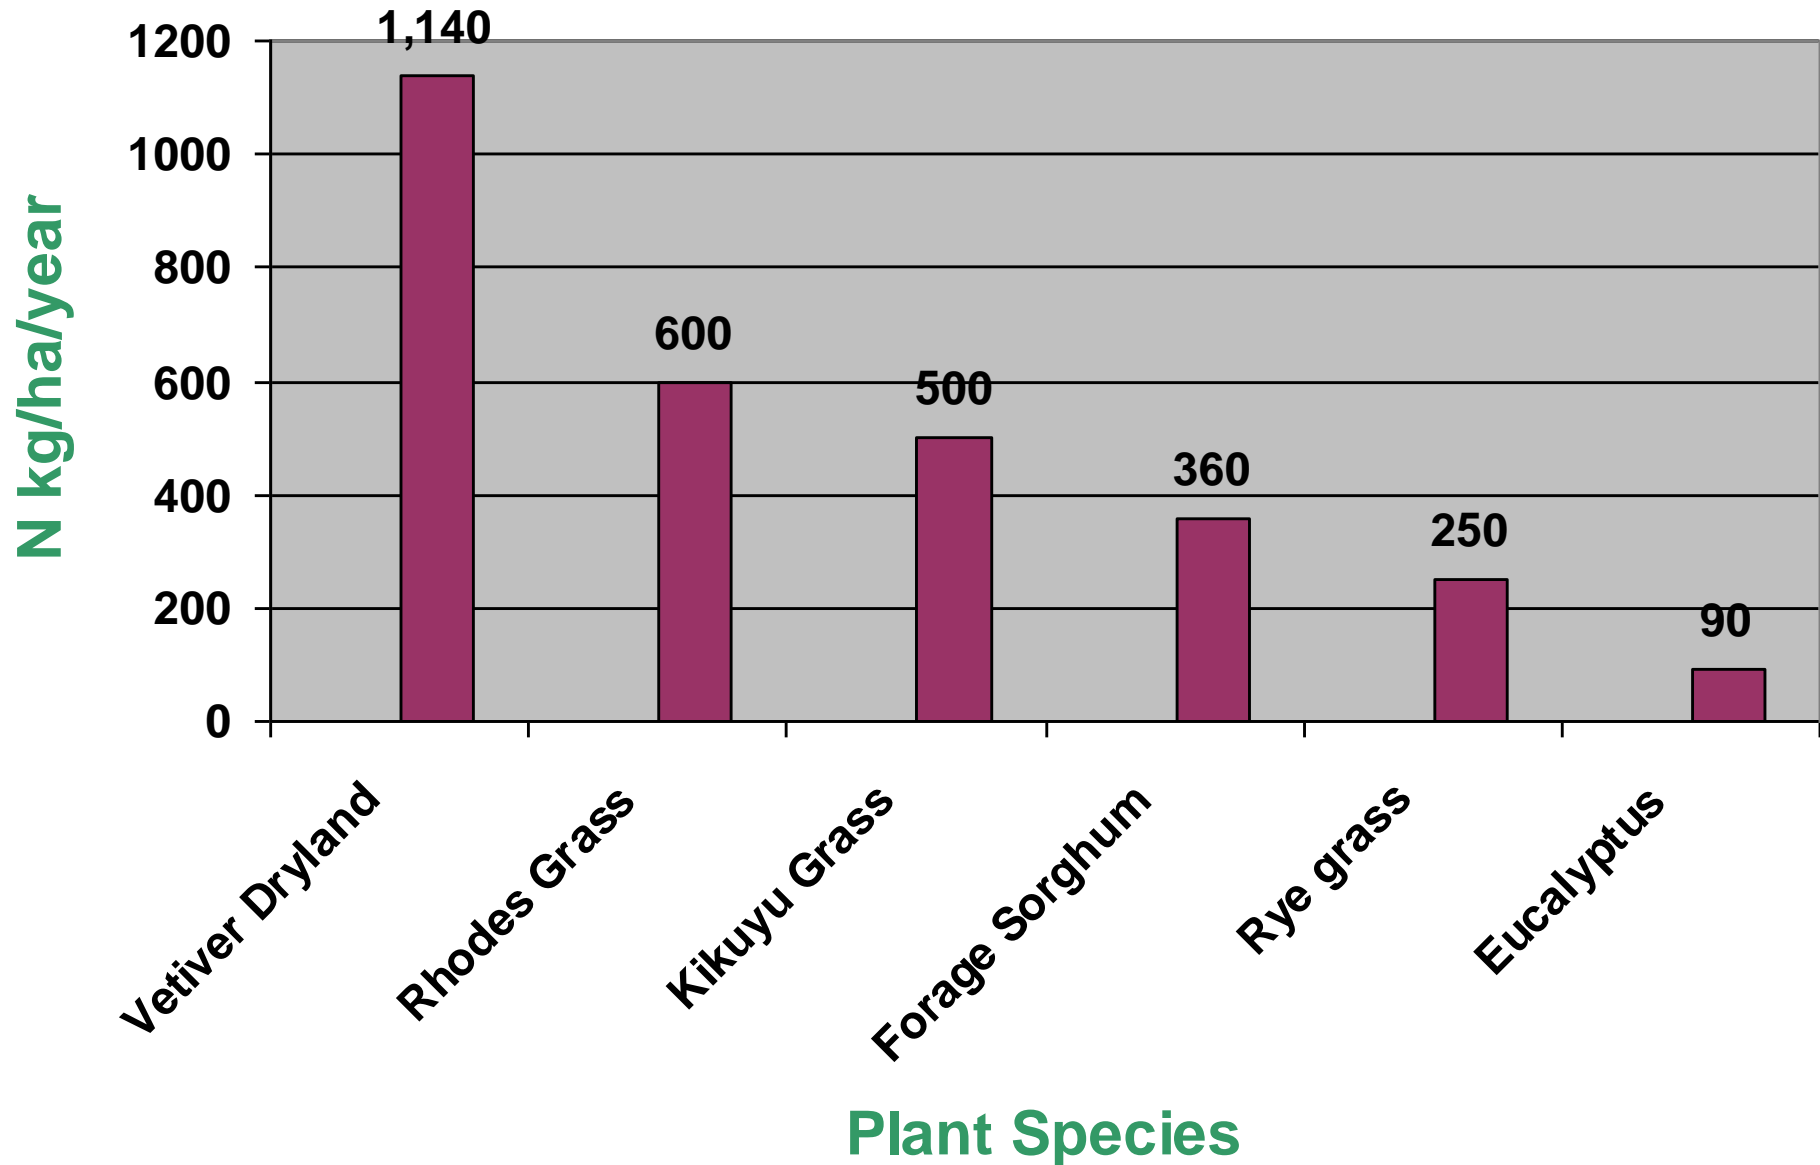


PHOSPHORUS UPTAKE

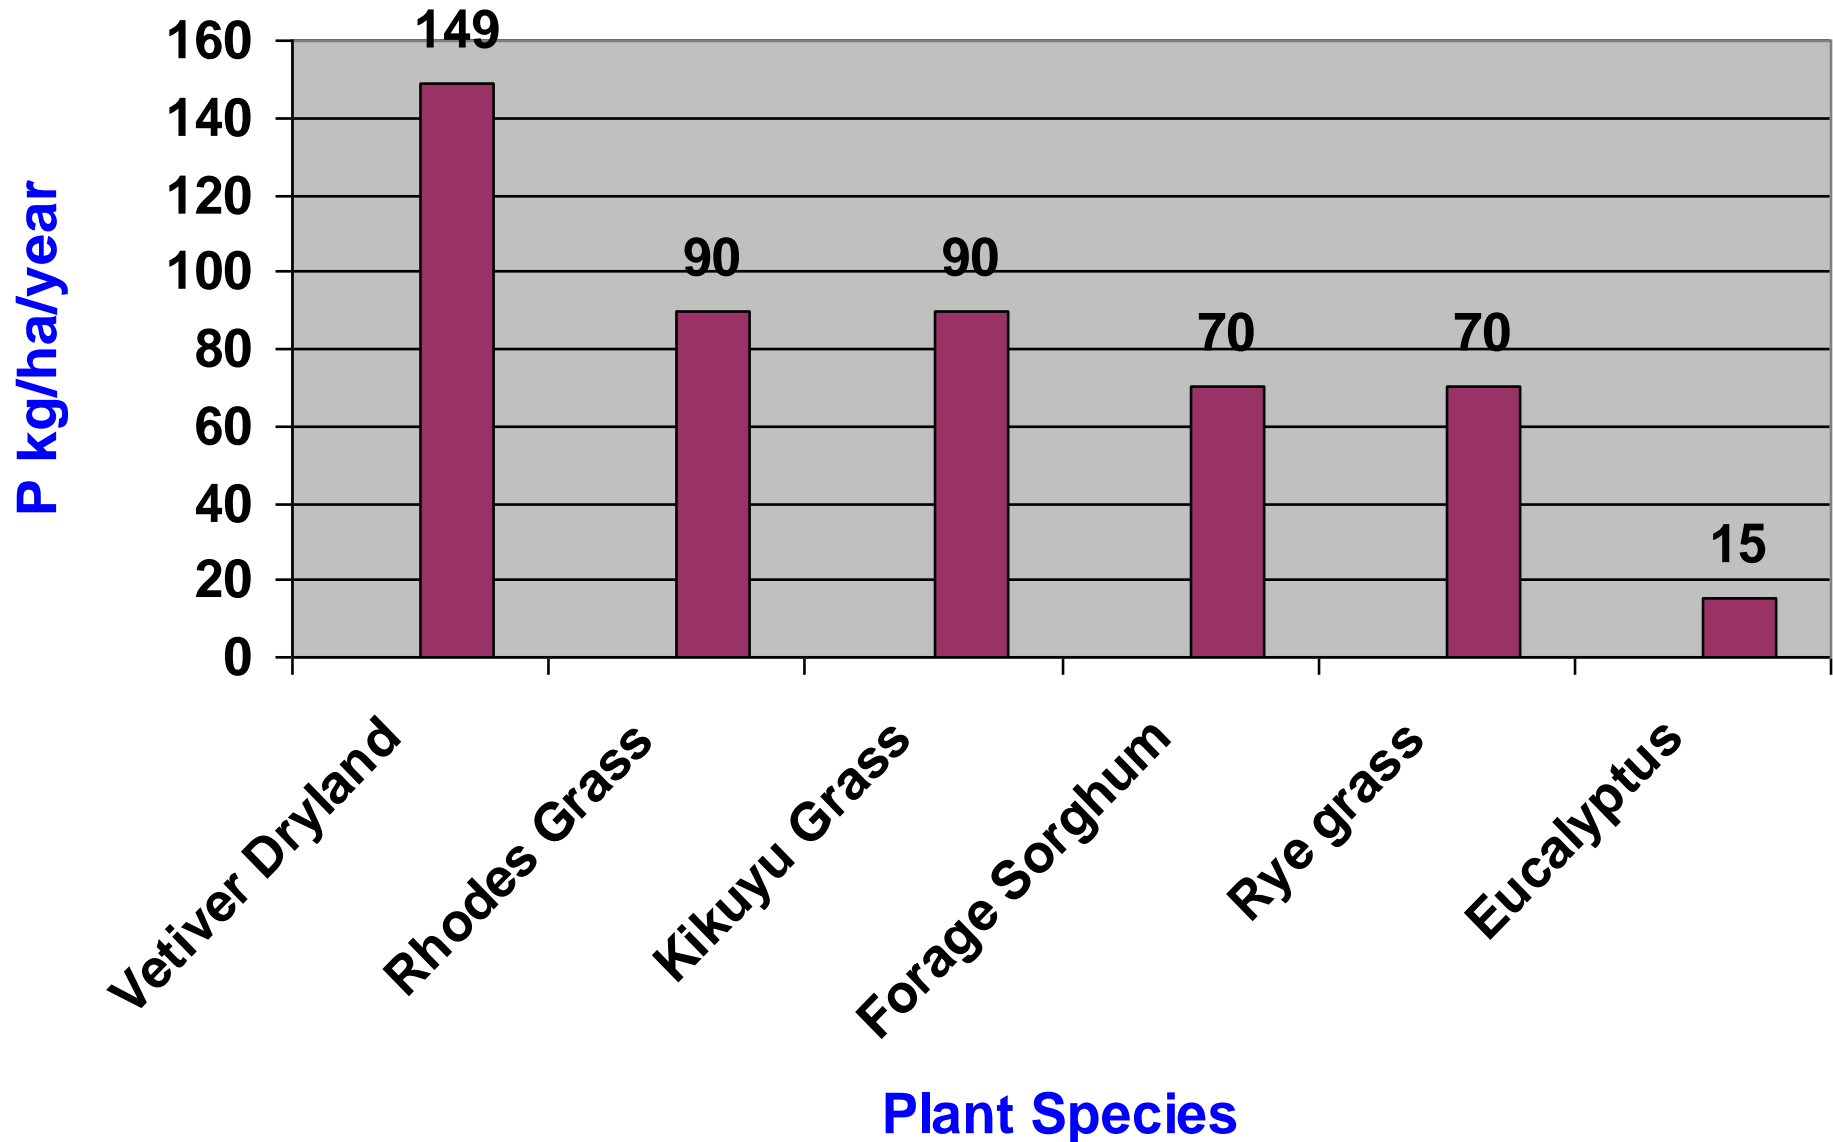


Tolerance to extremely high levels of nutrients

UNIQUE ATTRIBUTES

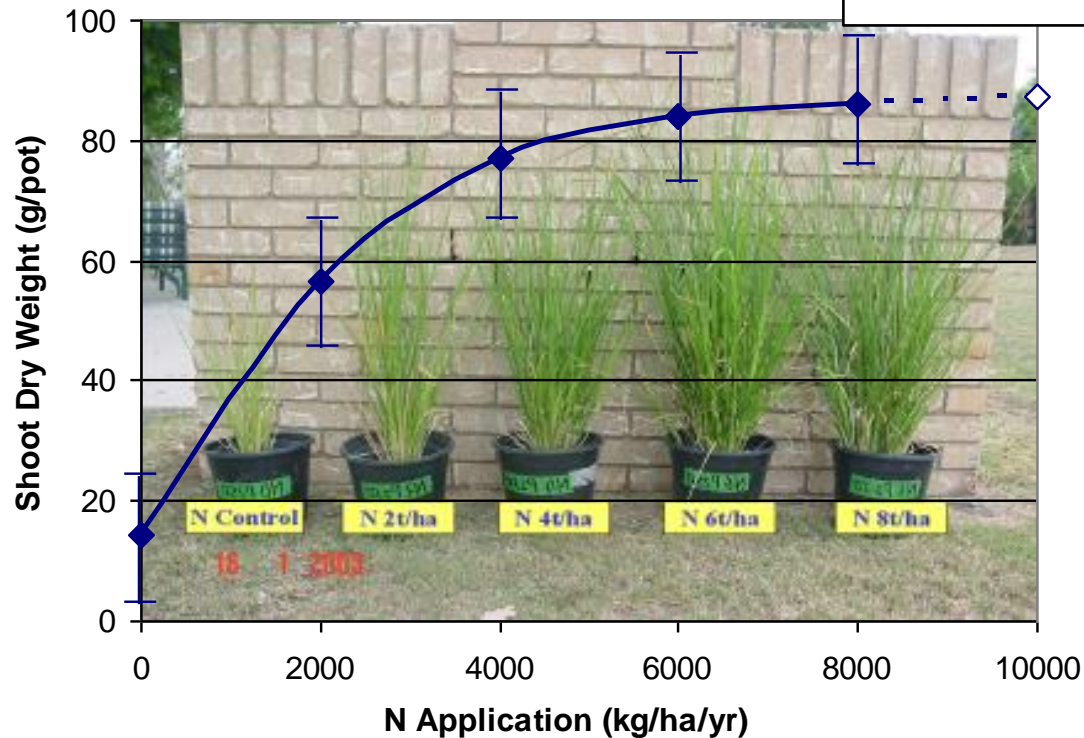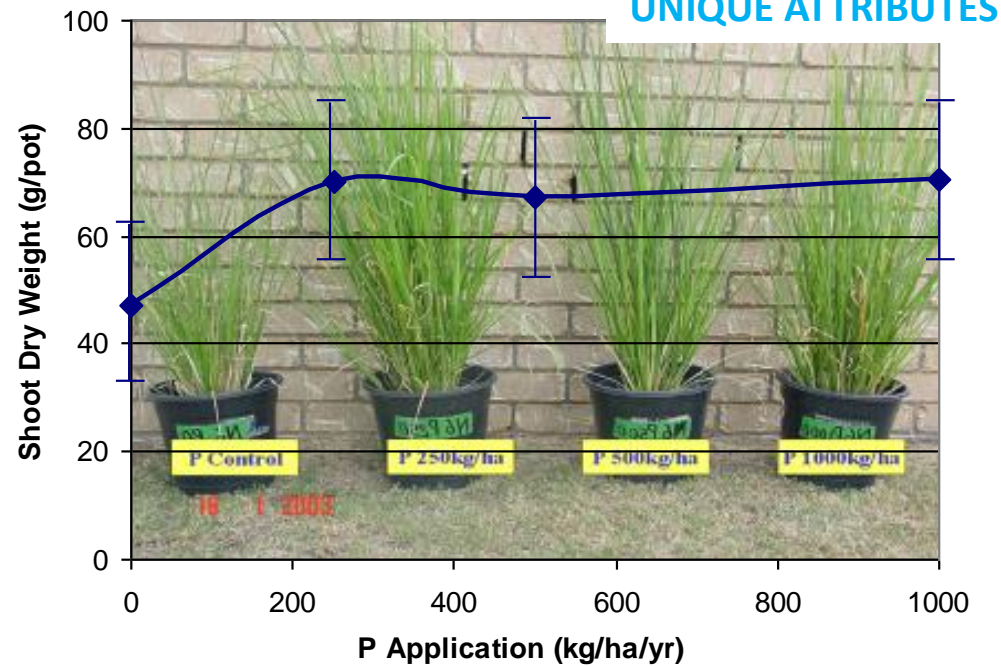

Potential dry matter yield of three grasses over time.

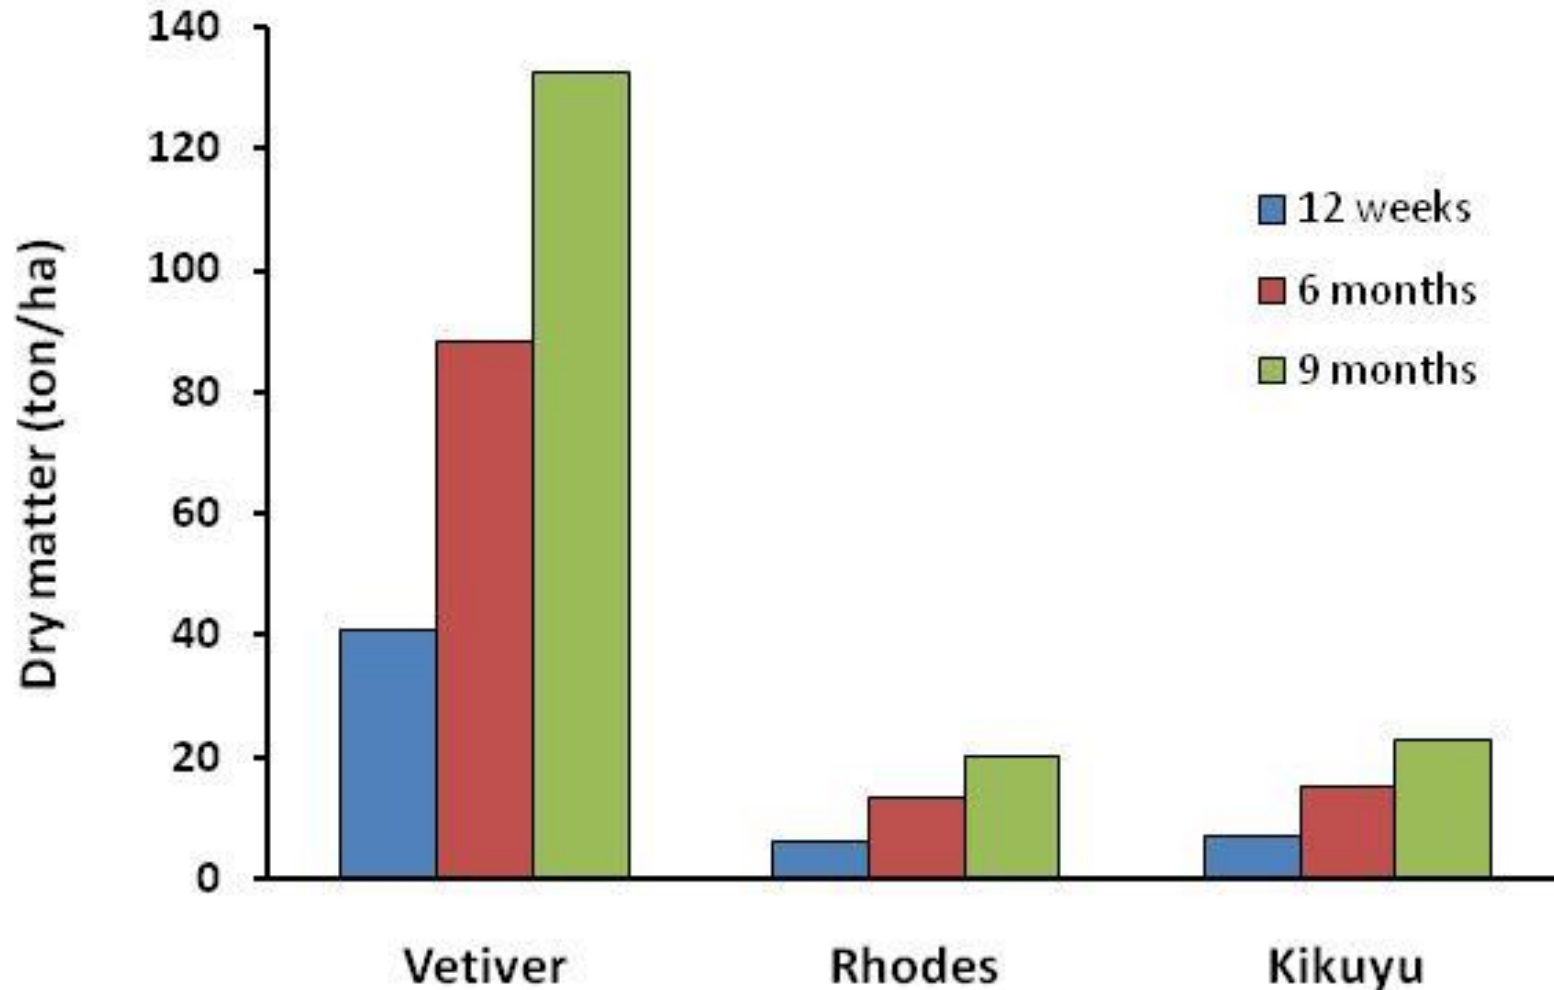

BIO-FILTER: For sediment control in waterways in cotton farms

UNIQUE ATTRIBUTES




Trapping coarse and fine sediment in cotton farms in Australia

UNIQUE ATTRIBUTES



Trapping herbicides on cotton farms in Australia

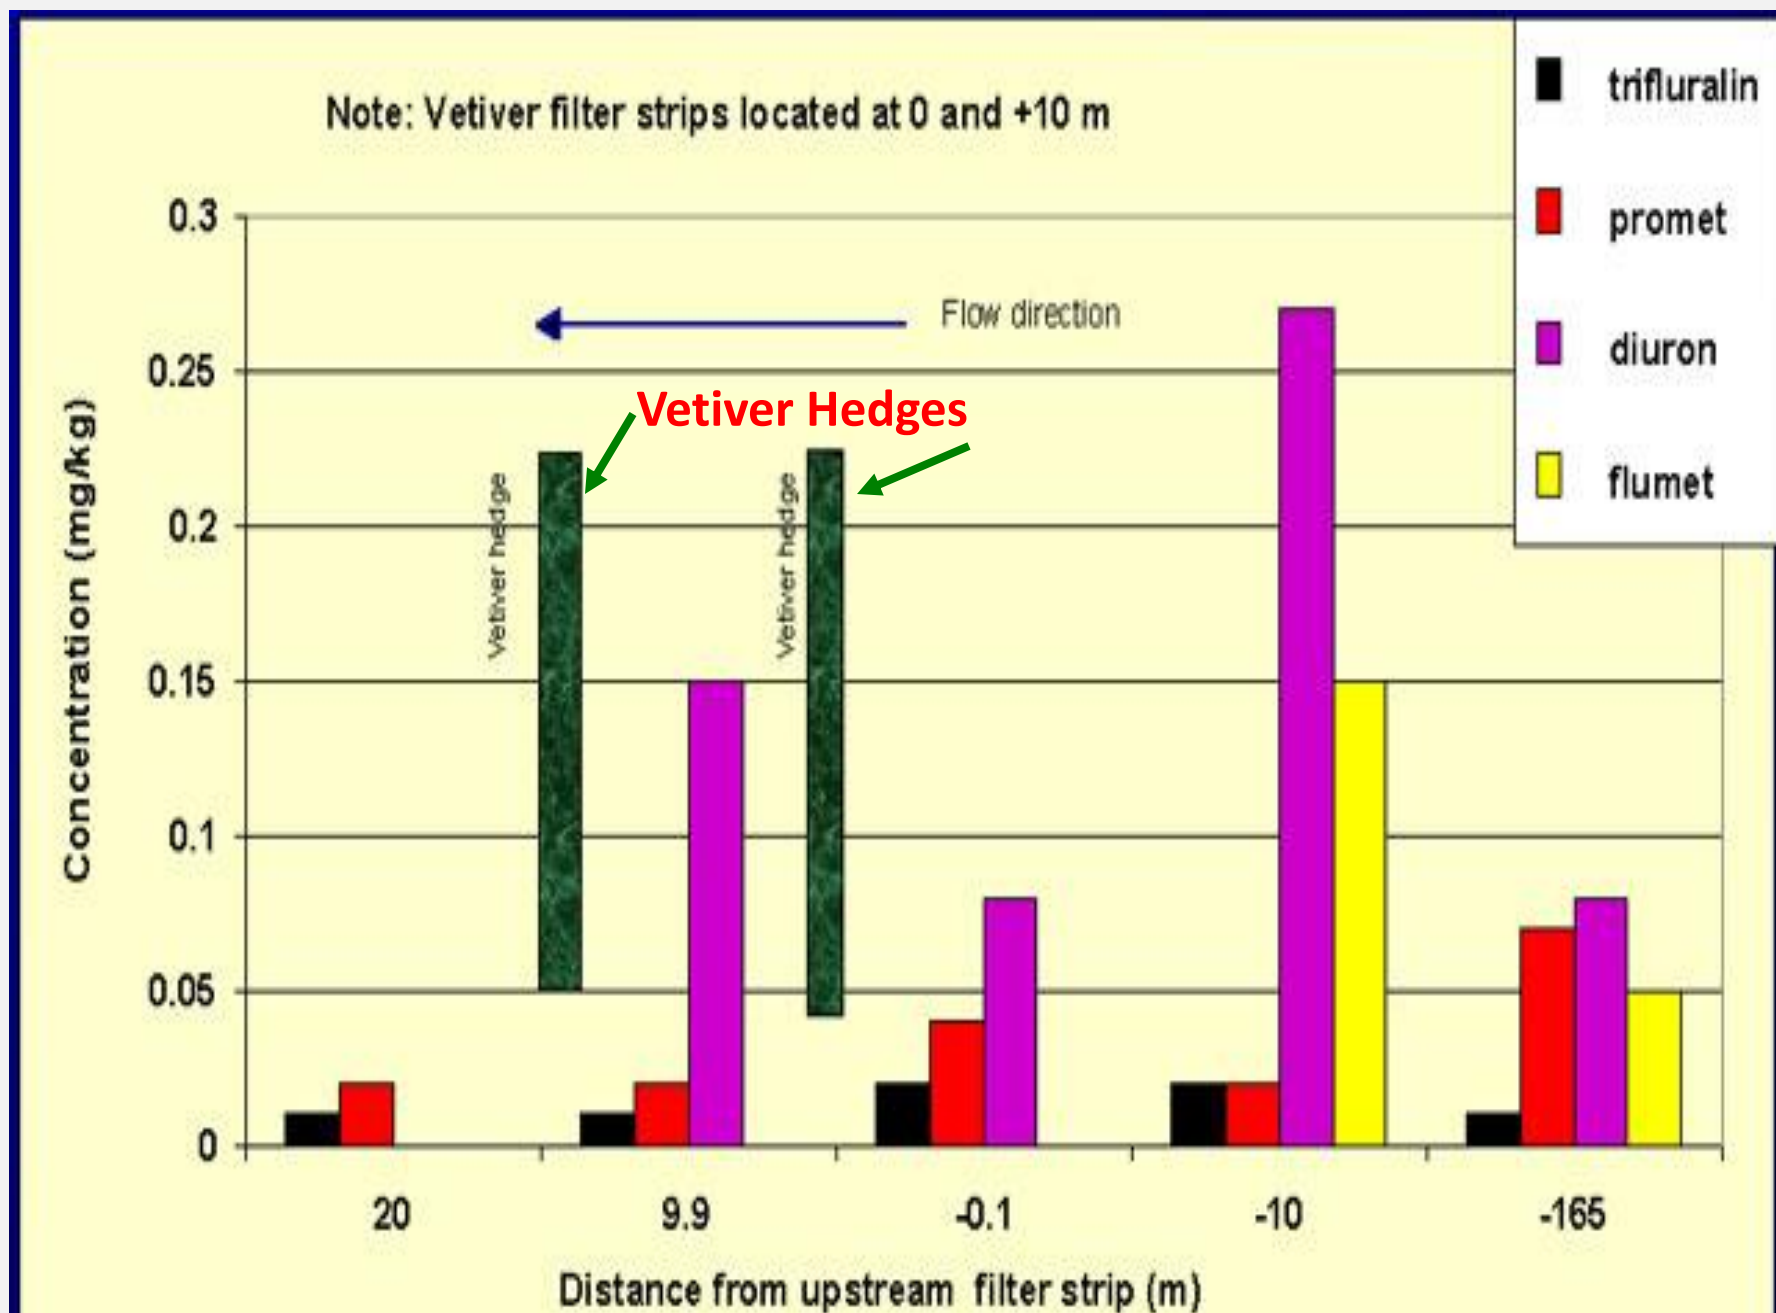

CASE STUDY 1: Disposal of domestic sewage effluent



Vetiver planting to absorb effluent discharge from a toilet block in a park in Brisbane.


Six months after planting this stand of 100 plants absorbs all the discharge from the toilet block



High capacity for N absorption in domestic sewage in Australia


Effectiveness of Vetiver in Reducing N in domestic sewage

ENTRY: Total N level at 95.2mg/L

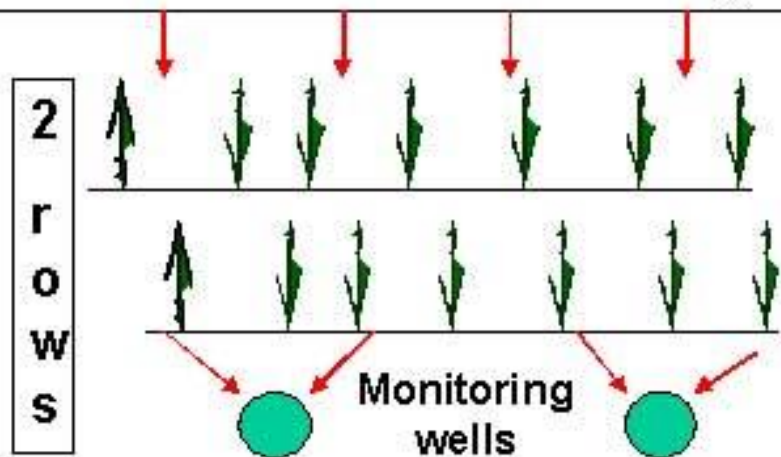

**EXIT: Total N level at 16mg/L
or a reduction of 83%**


ENTRY: Total N level at 95.2mg/L

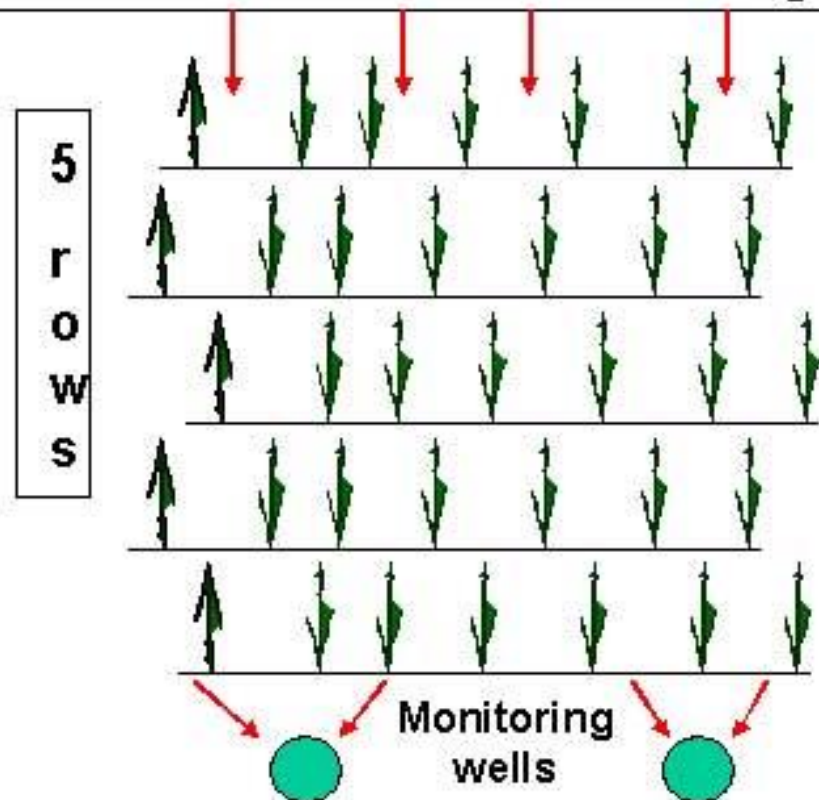

**EXIT Total N level at 1.2mg/L
or a reduction of 99%**


High capacity for P absorption in domestic sewage in Australia

Entry: Total P level at 1.3mg/L

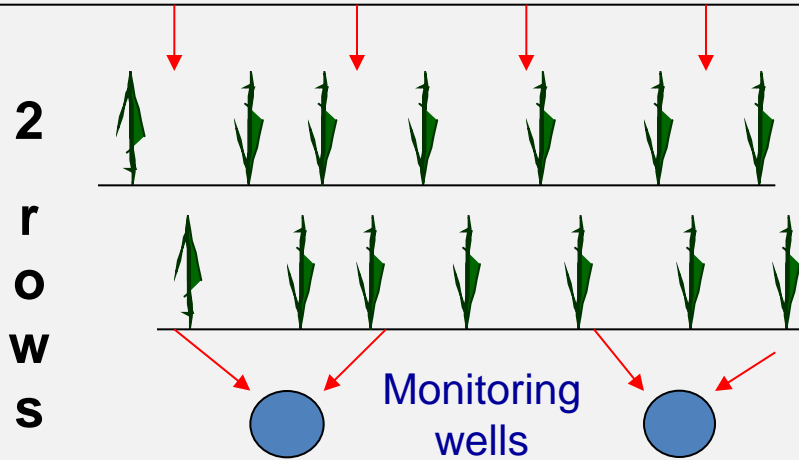

Exit: Total P level at 0.24mg/L
or a **reduction of 82%**


Entry: Total P level at 1.3mg/L

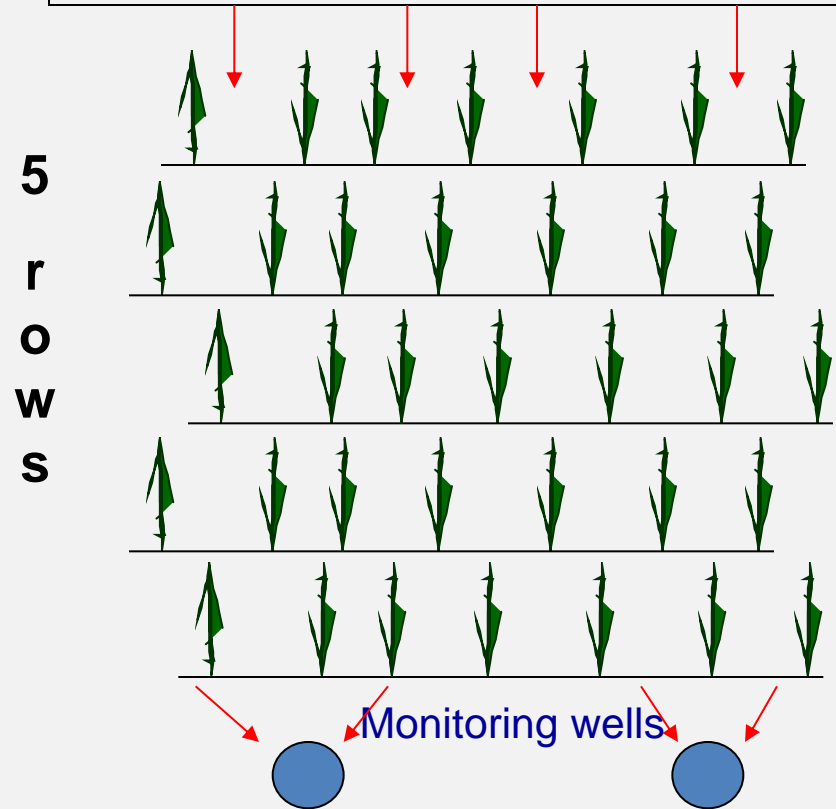

Exit: Total P level at 0.20mg/L
or a **reduction of 85%**

**VETIVER SYSTEM TECHNOLOGY
FOR PREVENTION AND TREATMENT
OF CONTAMINATED WATER**

CASE STUDY 2: Disposal of sewage effluent a small community

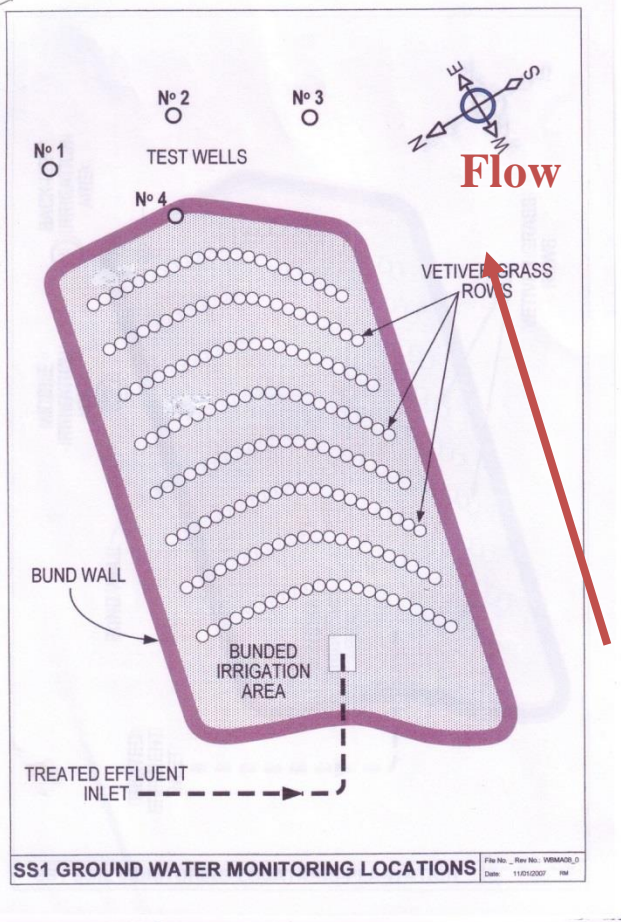

- 8 rows of 10m long vetiver
- Row spacing 1m
- Plant spacing 20cm
- Total plants 400
- Land area 100 sqm



RESULTS



Better growth

Poorer growth

IN FLOW

Average daily flow: **1 670L**

Average total N: **68mg/L**

Average total P: **10.6mg/L**

Average Faecal Coliform: **>8 000**

OUT FLOW

Average daily flow: **Almost Nil***

Average total N: **0.13mg/L**

Average total P: **0.152mg/L**

Average Faecal Coliform: **<10**

*** Only flow after heavy rain**

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

CASE STUDY 3: Disposal of municipal domestic sewage effluent by hydroponic and Ephemeral Wetland treatment

Phase 1: Hydroponic treatment in storage ponds




Phase 2: Ephemeral Wetland treatment of municipal sewage effluent



Effluent quality before and after the vetiver treatment

Tests * (license requirements)	Effluent Input	Effluent Output
PH (6.5 to 8.5)8*	7.3 to 8.0	7.6 to 9.2
Dissolved Oxygen (2.0 minimum) *	0 to 2 mg/l	8.1 to 9.2 mg/l
5 Day BOD (20 - 40 mg/l max) *	130 to 300 mg/l	7 to 11 mg/l
Suspended Solids (30 - 60 mg/l max) *	200 to 500 mg/l	11 to 16 mg/l
Total Nitrogen (6.0 mg/l max) *	30 to 80 mg/l	4.1 to 5.7 mg/l
Total Phosphorous (3.0 mg/l max) *	10 to 20 mg/l	1.4 to 3.3 mg/l

CASE STUDY 4: Disposal of municipal domestic sewage effluent by land irrigation in Australia

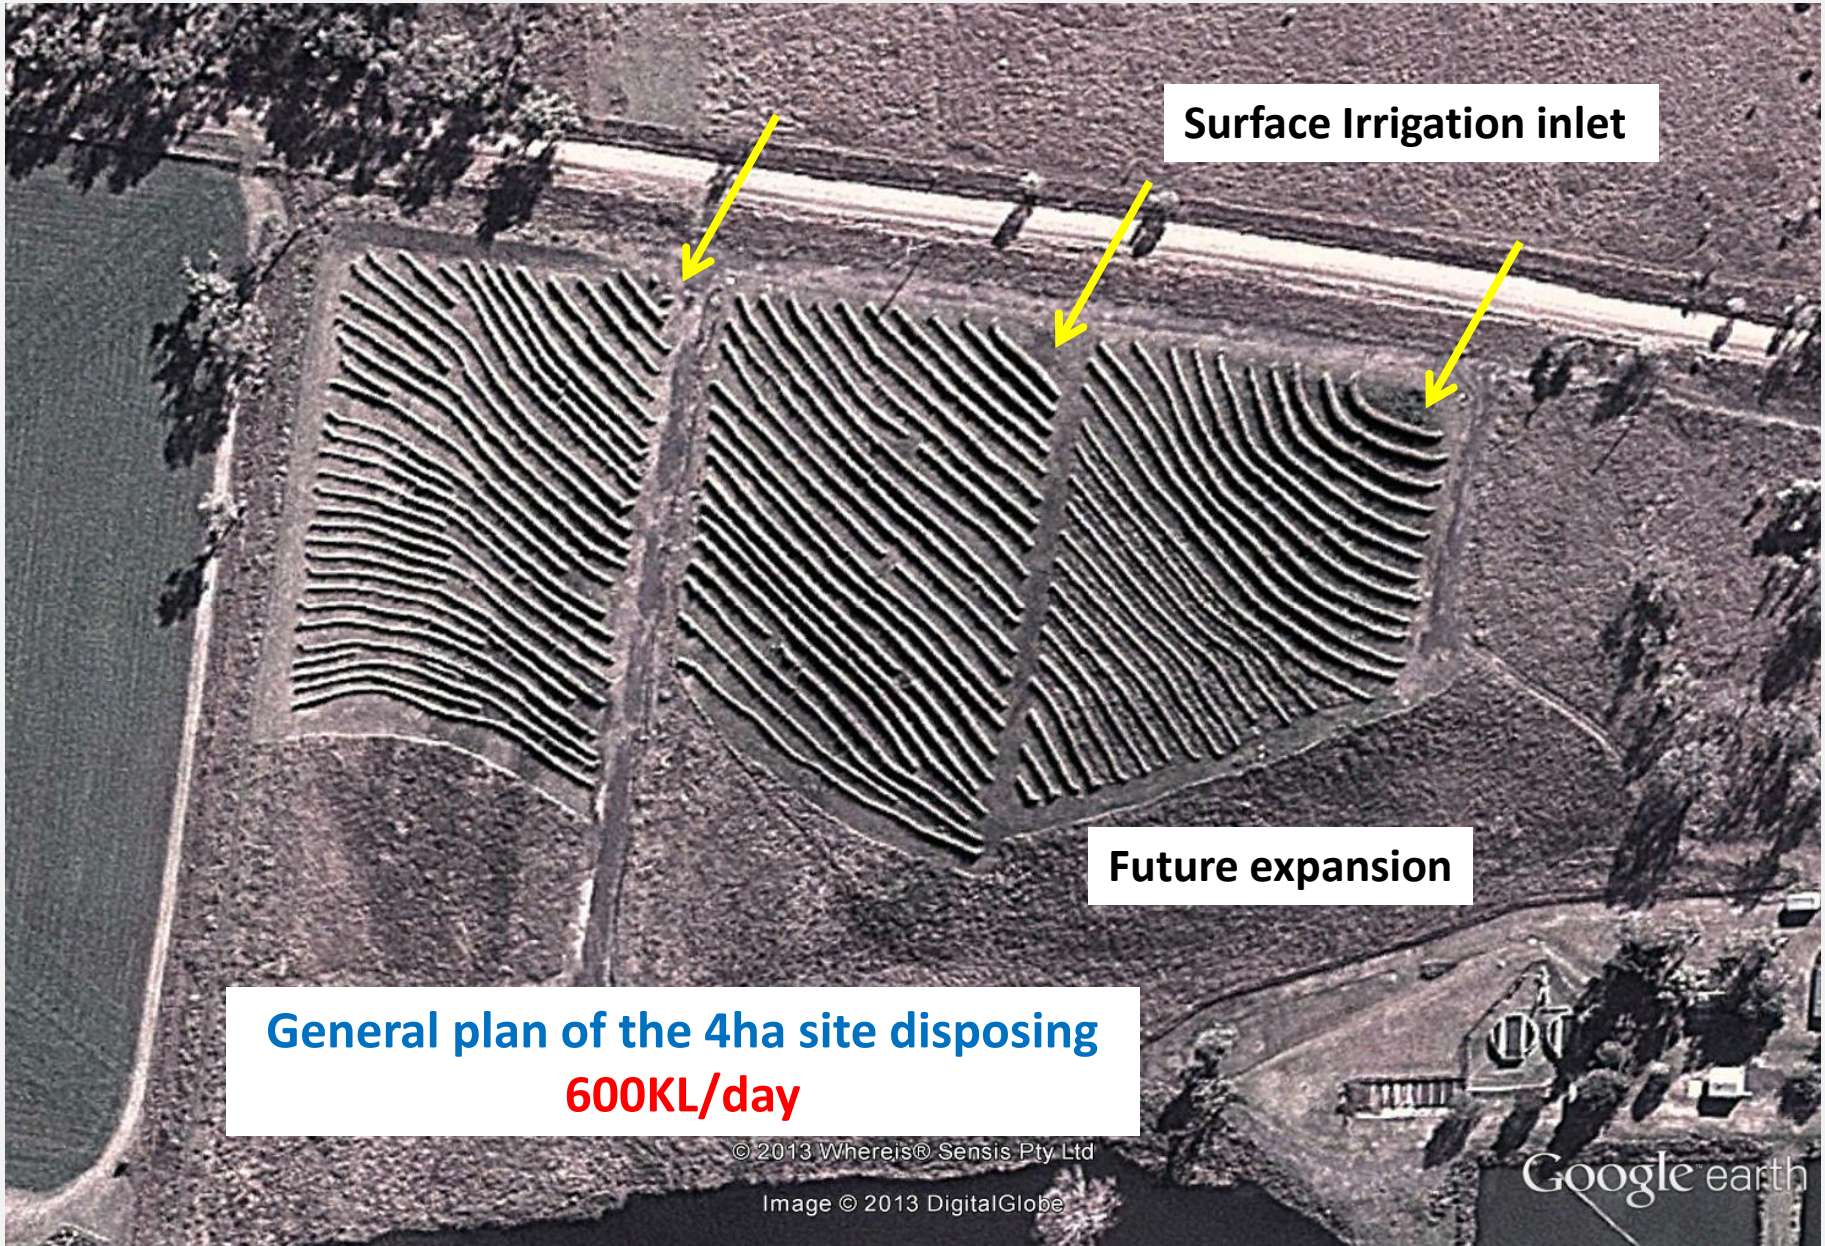

Surface Irrigation inlet

Future expansion

General plan of the 4ha site disposing
600KL/day

© 2013 Whereis® Sensis Pty Ltd

Image © 2013 DigitalGlobe

Google earth



**Six month
old**

12 month old




04 06 2012



Six month old


**This planting has
totally disposed
500-600KL/day**

12 month old

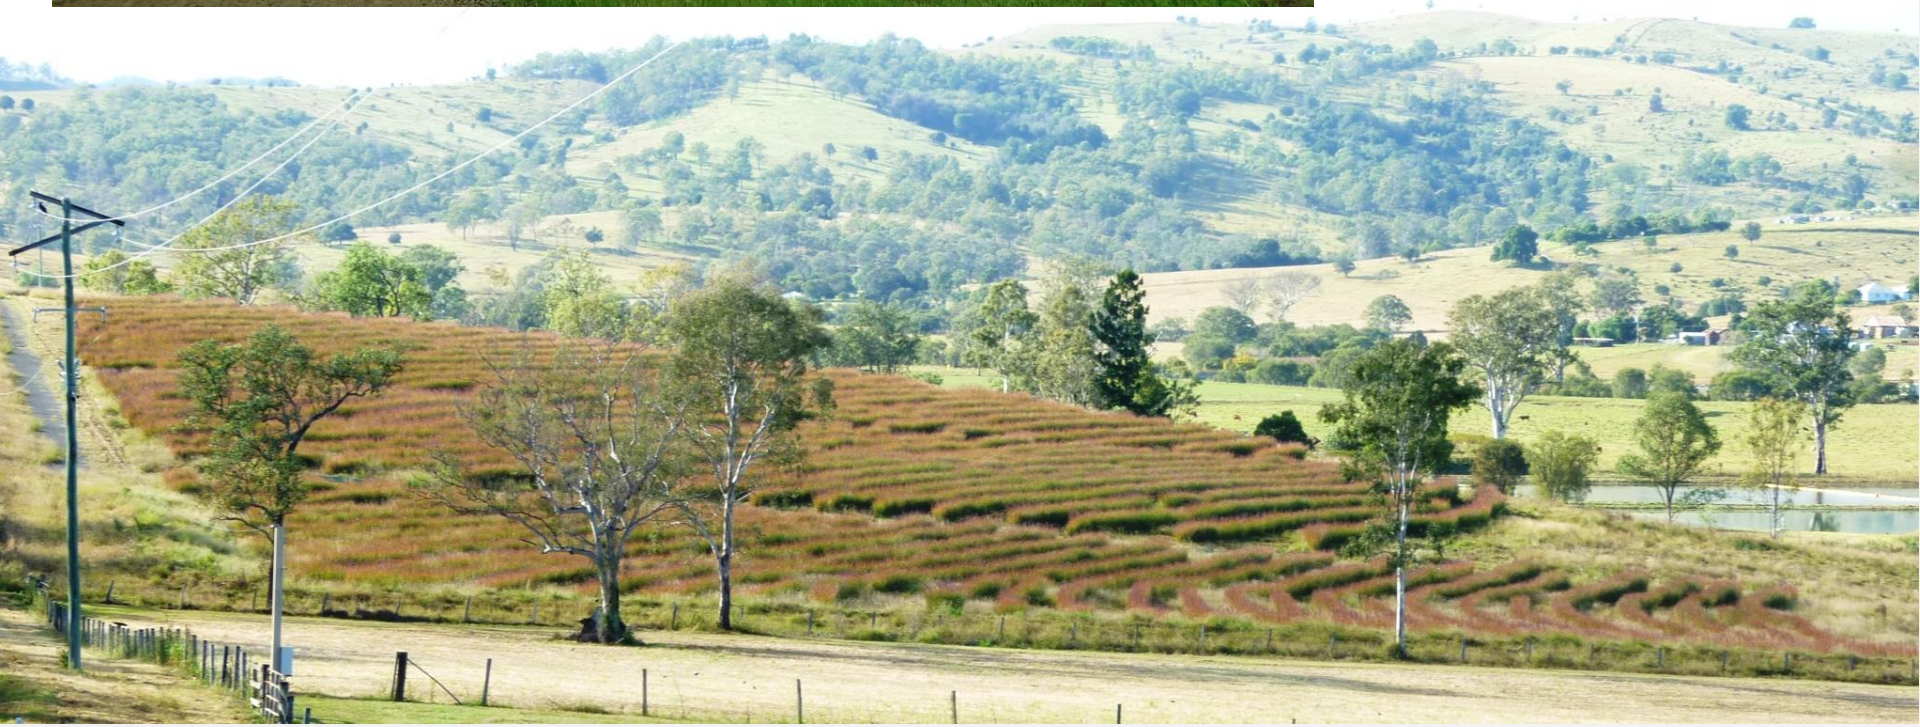

CASE STUDY 5: Disposal of municipal landfill leachate in Australia

Spray irrigation on landfill mound: the diagrammatic cross section of the mound (top left), vetiver irrigated every day with leachate after planting (top right), two (bottom left) and twelve (bottom right) months after planting.

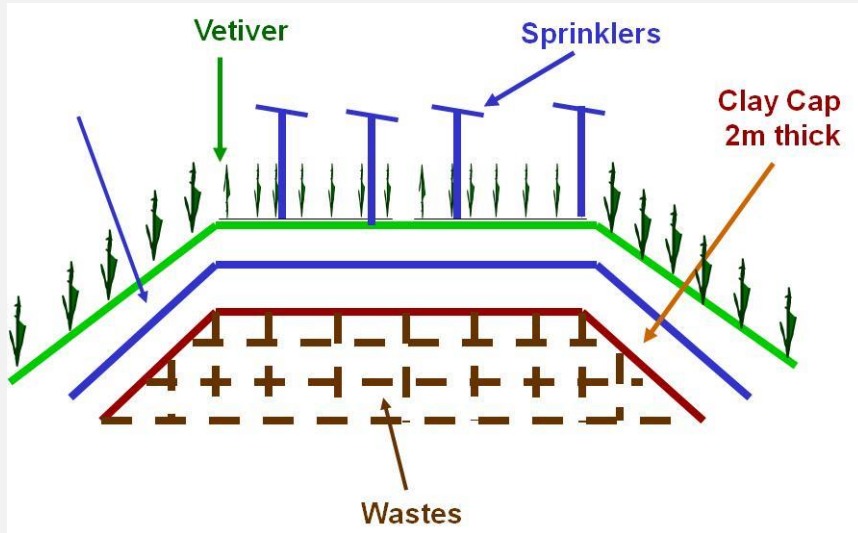

Vetiver growth was over 3m in the second summer

Growing in highly saline and polluted leachate pool



Fresh leachate pool



Twelve months after planting, the 3.5ha site disposing 4 ML/month




CASE STUDY 6: Disposal of industrial landfill leachate in Mexico

Early stage of vetiver establishment at Leon (left) and Poza Rica (right).



CASE STUDY 7: Disposal of industrial landfill leachate in USA

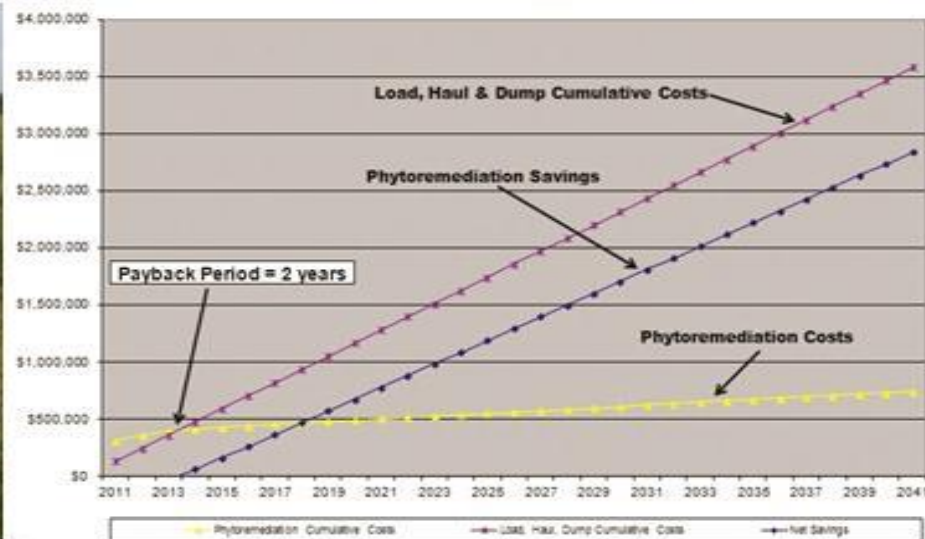

CASE STUDY 8: Disposal of industrial wastewater in Australia

Food processing factory effluent disposal by land irrigation. **The 22.5 ha site disposing 48ML/month**



CASE STUDY 9: Disposal of industrial wastewater in Australia

Wastewater from a beef abattoir in Australia

Effectiveness of vetiver planting on quality of effluent seepage

Analytes	Nutrient levels		
	Inlet	Mean levels in monitoring bores	
		20m down slope from inlet	50m down slope from inlet
pH	8.0	6.5	6.3
EC (uS/cm)	2200	1500	1600
Total Kjeld. N (mg/L)	170	11.0	10.0
Total N (mg/L)	170	17.5	10.6
Total P (mg/L)	32	3.4	1.5

CASE STUDY 10: Disposal of industrial wastewater in Vietnam


A seafood processing factory the Mekong Delta




CONCLUSION
These results show that the factory should retain the 50KL effluent output for 48 hours in the vetiver field before discharging into the nearby creek.



Total Nitrogen Levels

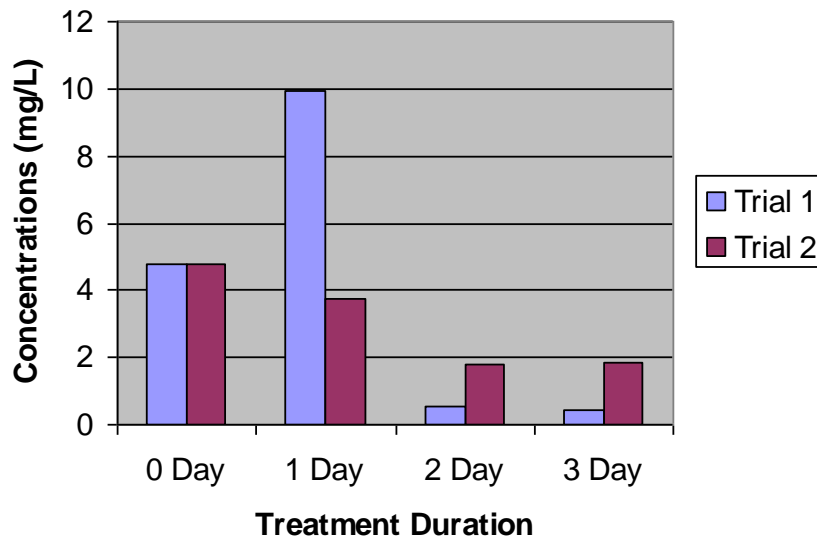

Total Phosphorus Levels

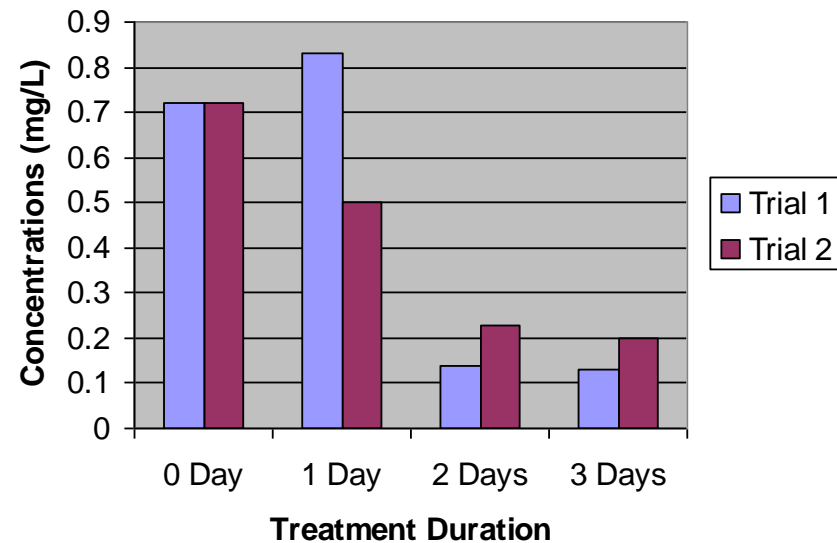

VETIVER SYSTEM TECHNOLOGY

FOR PHYTO REMEDIATION OF

CONTAMINATED LAND

Threshold levels of heavy metals to vetiver growth based on single element experiment

UNIQUE ATTRIBUTES

Heavy metals	Threshold to growth of most vascular plants (mg kg ⁻¹)		Threshold to vetiver growth (mg kg ⁻¹)	Vetiver survival under the highest levels of metals reported in the literature (mg kg ⁻¹ soil)
	Hydroponic level	Soil level	Soil level	
Arsenic	0.02-7.5	2.0	100-250	959
Boron				180
Cadmium	0.2-9.0	1.5	20-60	60
Copper	0.5-8.0	NA	50-100	2600
Chromium	0.5-10.8	NA	200-600	2290
Lead	NA	NA	>1500	10750
Mercury	NA	NA	>6	17
Nickel	0.5-2.0	7-10	100	100
Selenium	NA	2-14	>74	> 74
Zinc	NA	NA	>750	6400

The highest concentrations of heavy metals accumulated in the roots and shoots of vetiver reported in the literature

Heavy metals	Soil condition		Hydroponic condition	
	Roots (mg kg ⁻¹)	Shoots (mg kg ⁻¹)	Roots (mg kg ⁻¹)	Shoots (mg kg ⁻¹)
Lead	4940	359	≥ 10,000	≥ 3350
Zinc	2666	642	>10,000	>10,000
Chromium	1750	18		
Copper	953	65	900	700
Arsenic	268	11.2		
Boron	28	17		
Cadmium	~ 25	~ 44	2232	93

CASE STUDY 11: Ammonia and nitrate contaminated site at Bajool, Australia

This site was contaminated with extremely high levels of Ammonia and Nitrate as a result of explosive manufacturing.

Land surface area: 7 300m²

Soil depth: 2.5m to 3.0m

Contaminate soil volume: 20 000m³

Soil Ammonia level, ranging from 20 -1 220mg/kg, averaging 620mg/kg

Soil total N level, ranging from 31-5 380mg/kg, averaging 2 700mg/kg

Water Ammonia level, ranging from 235-1 150mg/L, with one sample at 12 500mg/L

Water total N level, ranging from 118 – 7 590mg/L, with one sample at 18 300mg/L



8 months after planting



Hydroponic treatment of pig farm effluent



China



Vietnam

Thank You

18 16:16