

# **VETIVER GRASS TECHNOLOGY FOR REHABILITATION OF MINING WASTES AND TAILINGS**


**Paul Truong**  
*TVNI Technical Director*  
*Director for Asia and Oceania,*  
**Brisbane, Australia**

---


*All materials in this document remain the property of TVNI. Permission must be obtained for their use. Copyright © 2017*



# TREATMENT OF CONTAMINATED SITES

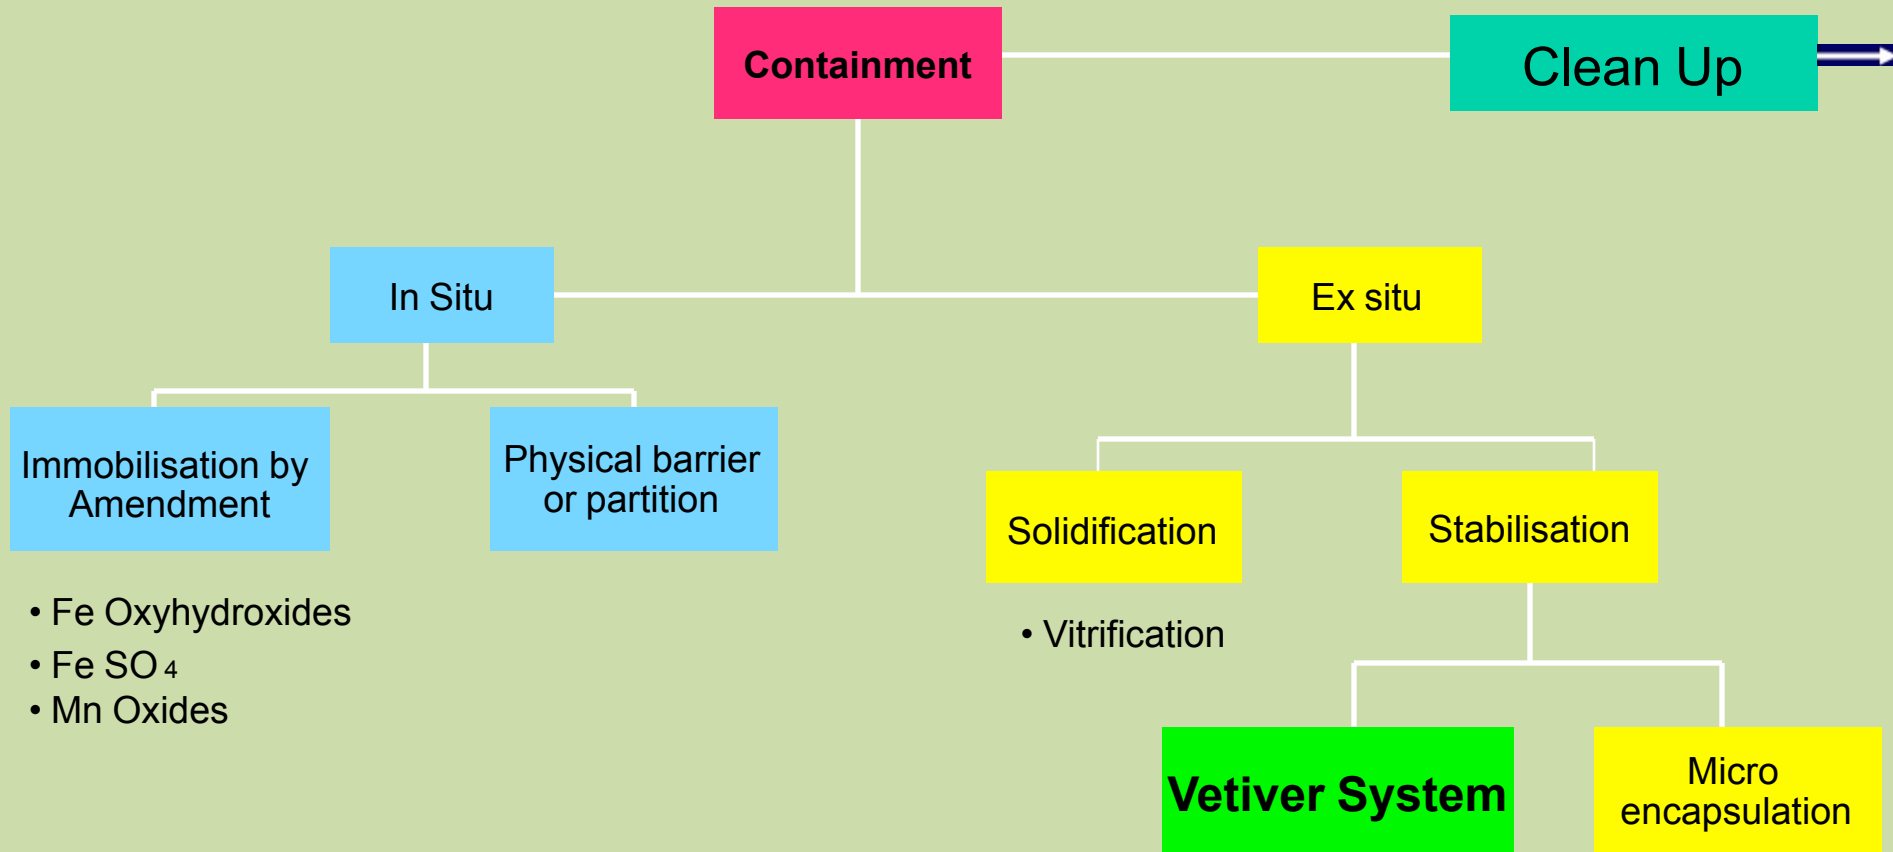

# TREATMENT OF CONTAMINATED SITES

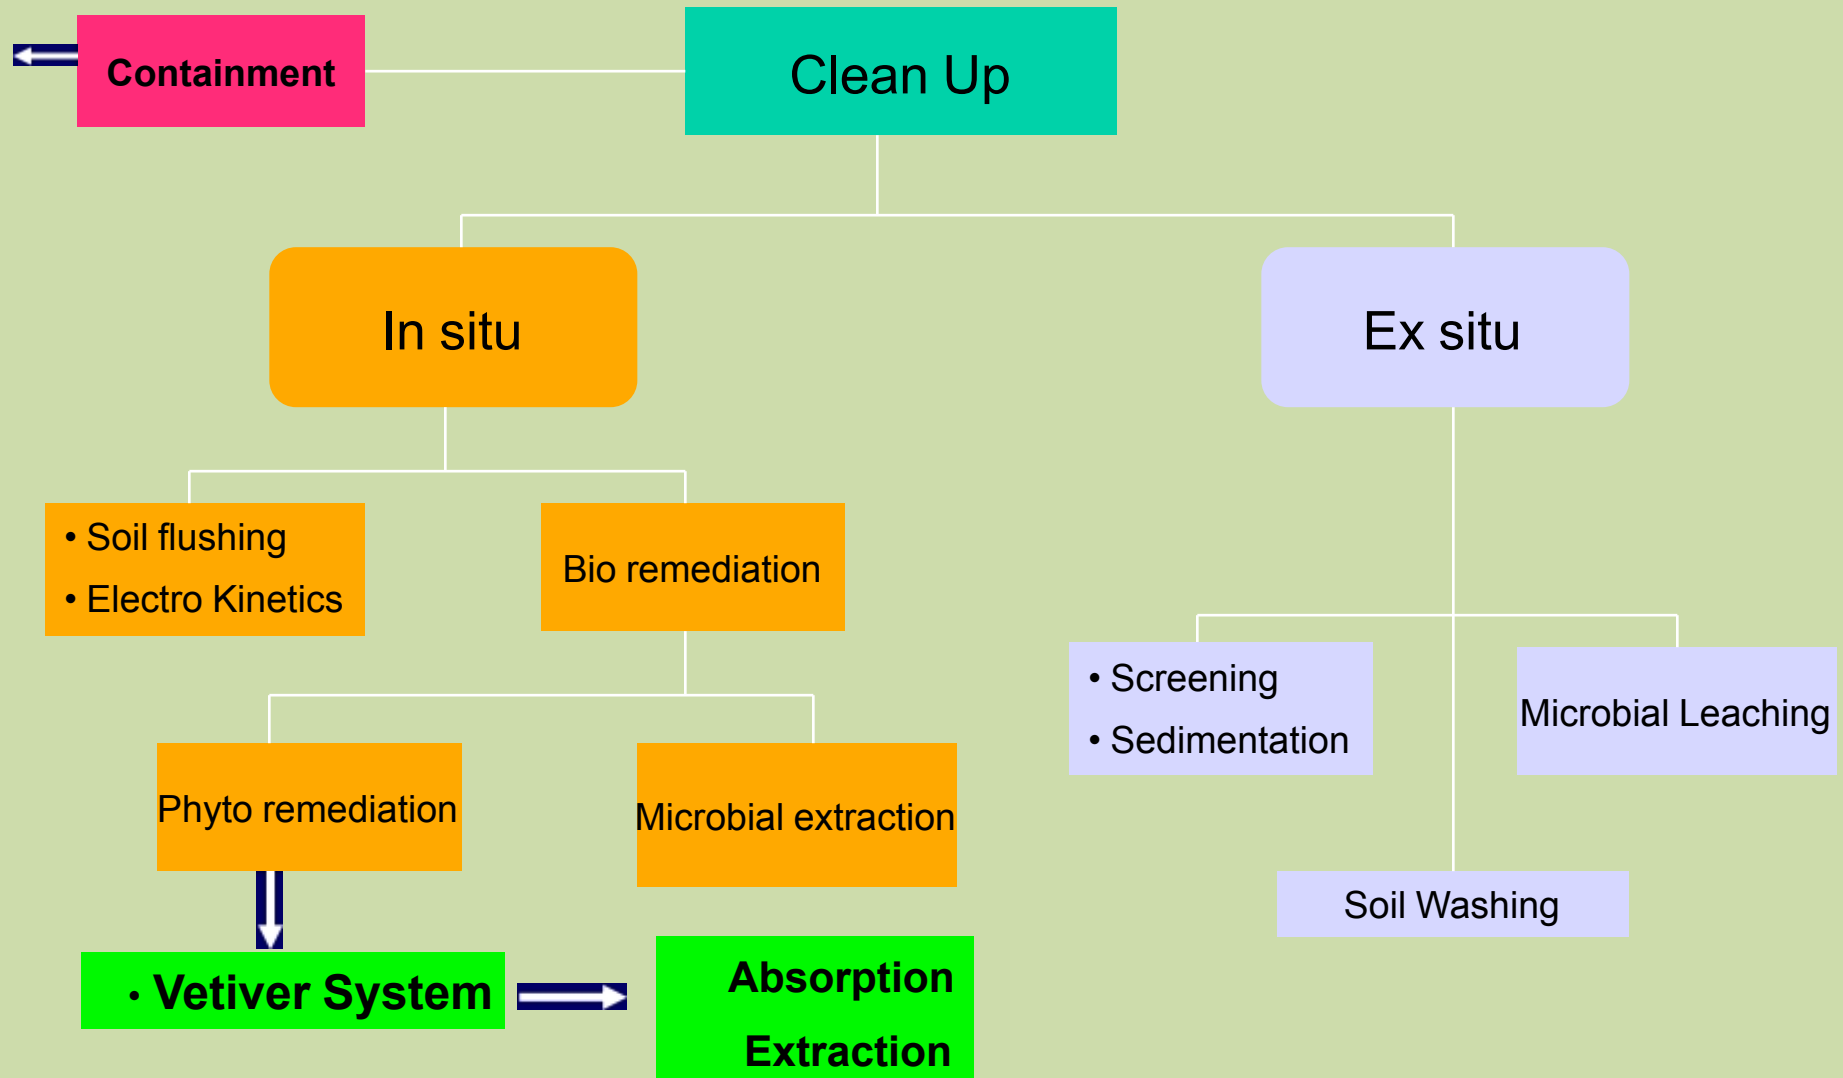

# Application of VST in Mining Area

- **VST could be used as an integrated technique for environmental management of mining activities.**
- **Firstly, solid mining wastes such as tailings and waste rocks could be stabilized by vetiver to control or reduce air and water erosion, then reduce the release of heavy metals to surroundings.**
- **Secondly, wastewater including acid mine drainage (AMD) could be purified by phytofiltration**
- **Thirdly, the surrounding lands contaminated by heavy metals could be further cleaned up by phytoextraction.**
- **A progressive worldwide increase in metalliferous mining in recent years opens up a vast range of prospects for IVT application.**





# **Special Characteristics of Vetiver Grass**

**The following characteristics make vetiver grass highly effective for mining wastes and tailings:**

- A deep, penetrating and extensive root system that binds the soil, and reinforces the soil structure which requires extraordinary force to dislodge.**
- Erect and stiff stems forming a dense hedge which is very effective in retarding water flow and reducing the erosive power of high velocity overland flows.**
- Vetiver is tolerant to highly adverse conditions such as saline, sodic and acidic soil conditions.**
- Vetiver is highly tolerant to elevated levels of heavy metals in mine tailings**
- Vetiver is tolerant to fire, frost, drought, water logging and inundation**





**Stiff and erect  
stems:**

**Erect stems up  
to 1.8m tall and  
over 2m with  
flower head**

**Forming a thick  
hedge when planted  
in row which can  
spread and slow  
down runoff water**





### ***Special Morphological Features***

**Even at this young age  
the stiff **stem** is strong  
enough to trap large  
size gravel**

**Strong current  
flattened the native  
grass but not vetiver  
on this waterway**





# DEEP, EXTENSIVE AND PENETRATING ROOT SYSTEM

**China: One year old with 3.3m deep root system**



**Vietnam: Agriculture & Forestry University, Saigon**



## ***Special Morphological Features***



**Strong root  
reinforcement  
holding up this wall  
of soil against water  
erosion**

**Solid wall reinforced  
by vetiver roots**





## **Submergence and drought tolerance**

**Tests conducted in China found that when completely submerged, vetiver survived for 54 days.**




**Growing vigorously in water.**

**Vetiver remained green but all native grasses were brown off under semi arid conditions in western Queensland .**



# Tolerance to high soil and water salinity


Saline threshold level is at  $EC_e = 8 \text{ dsm}^{-1}$  , 50% growth reduction at  $17.5 \text{ dsm}^{-1}$  . Salt level of sea water is about  $45\text{-}50 \text{ dsm}^{-1}$  and vetiver can survive at  $47.5 \text{ dsm}^{-1}$  under dry land salinity conditions

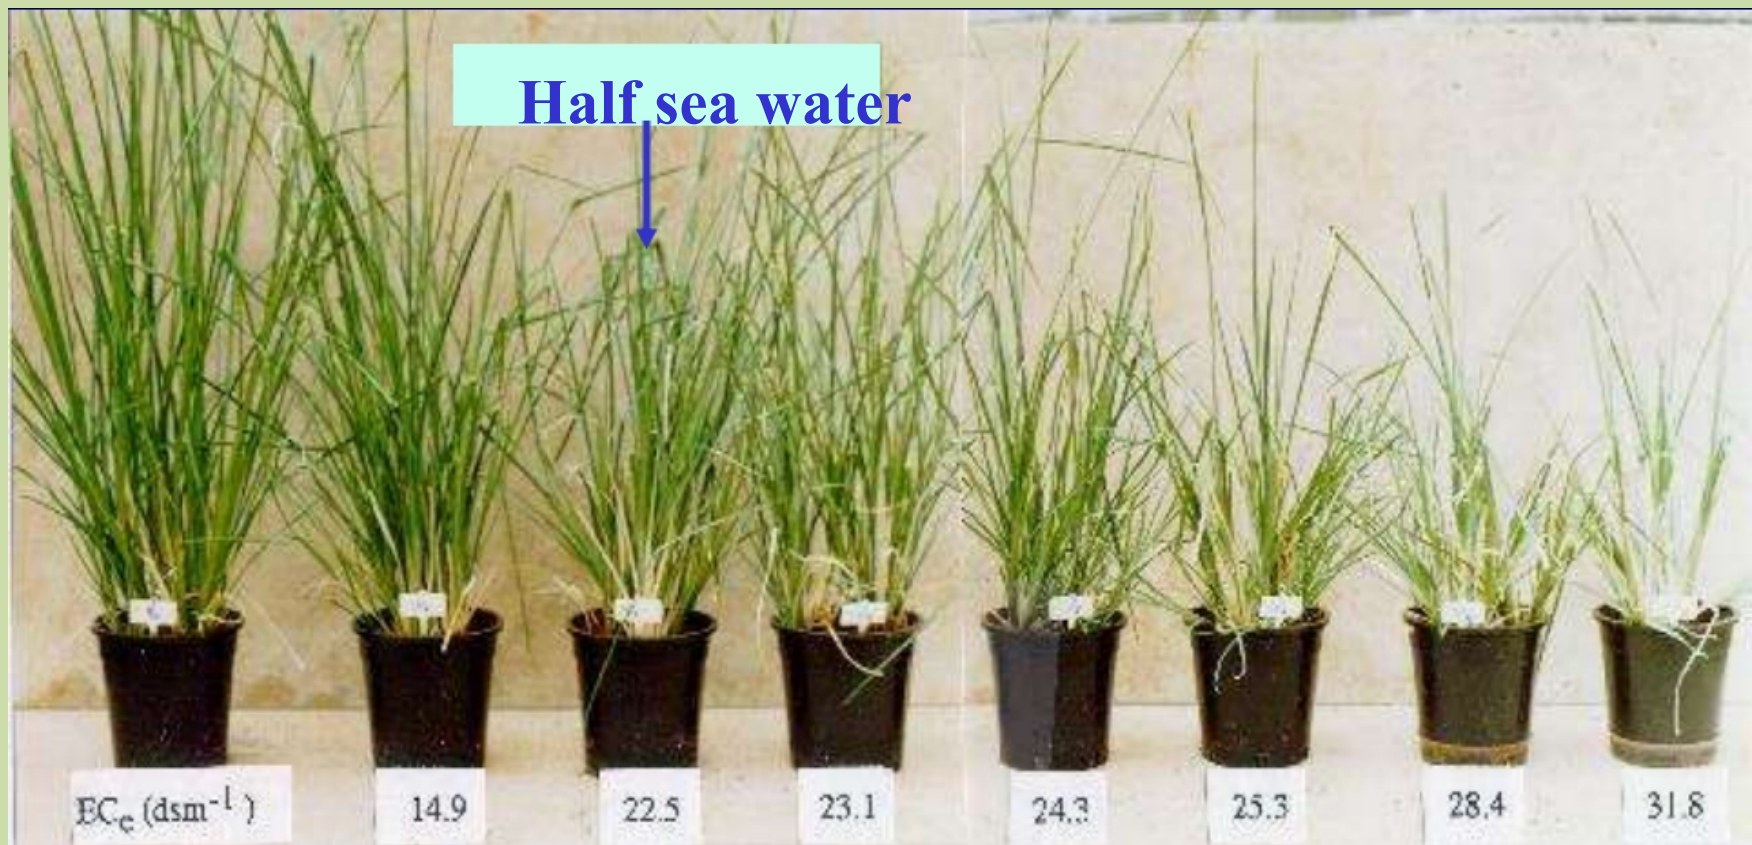



# ***Physiological Features***

**One year after planting, vetiver growing among mangrove seedlings**

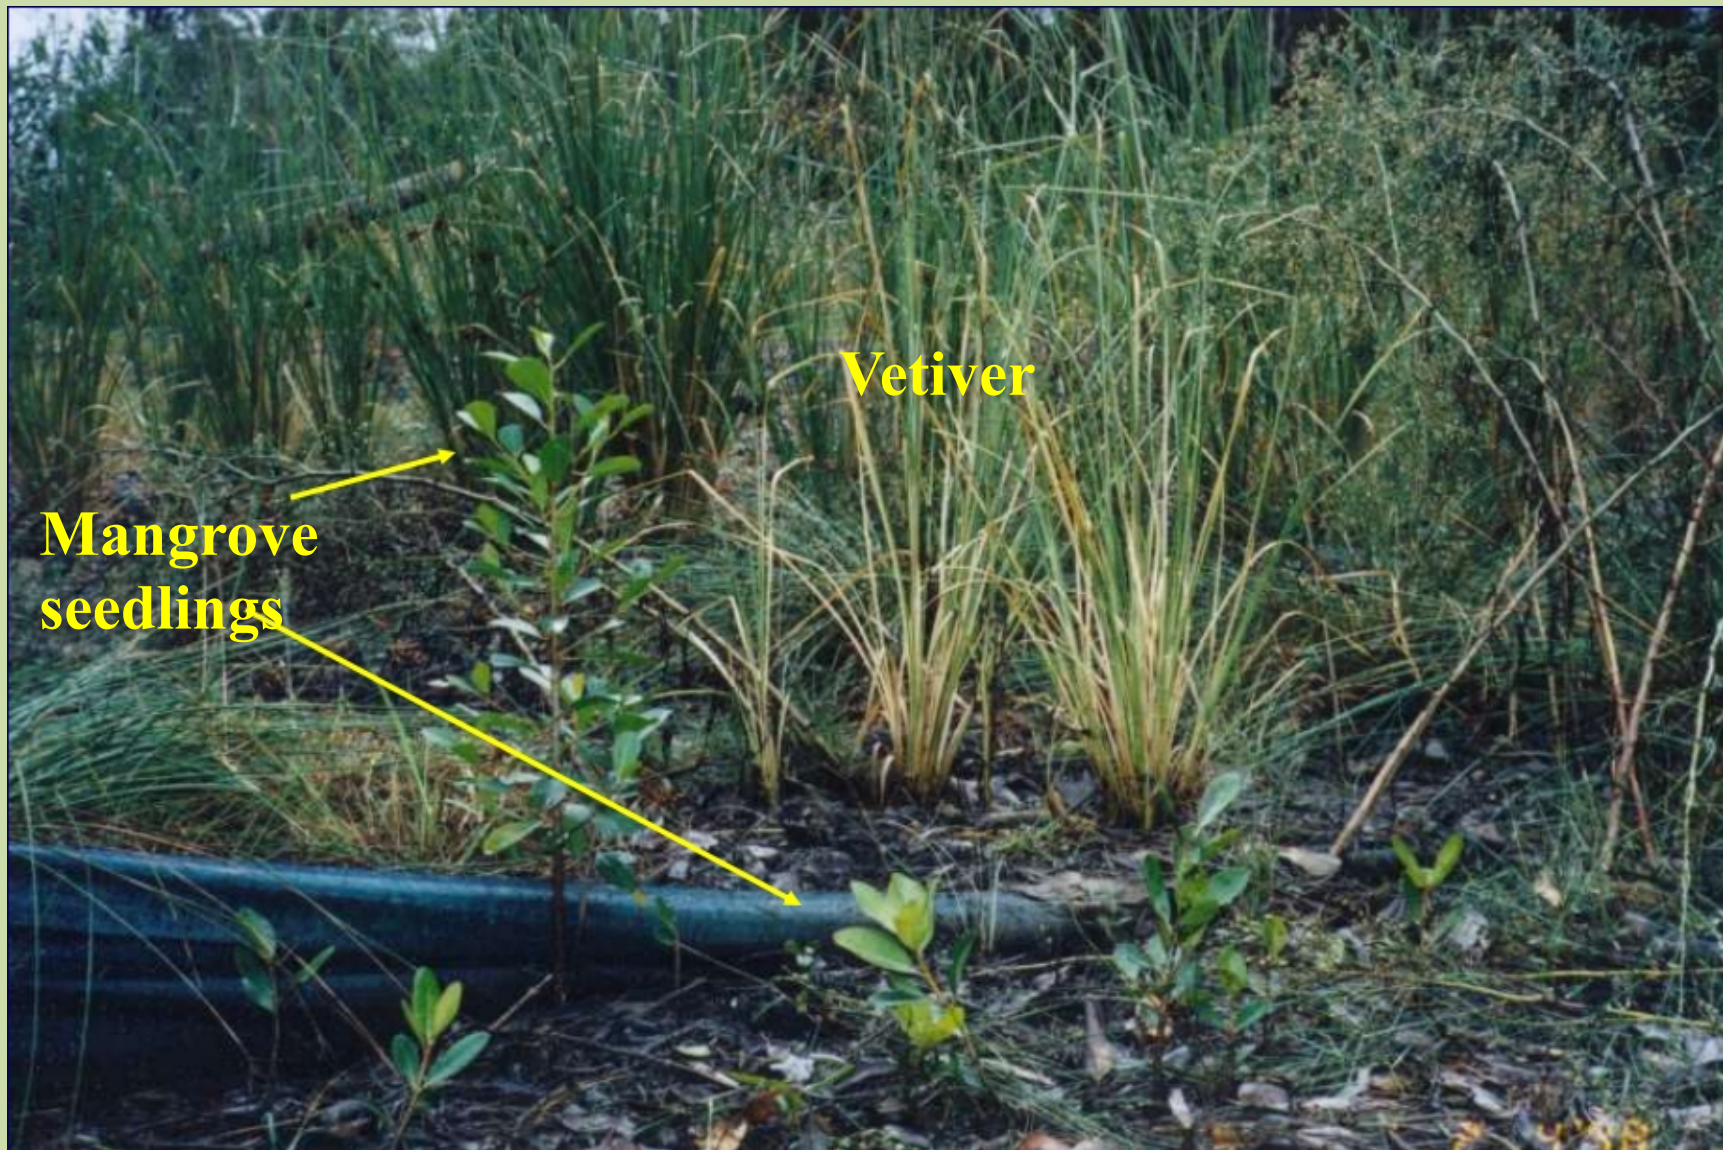



## Salt tolerance level of Vetiver grass as compared with some crop and pasture species grown in Australia.

Plant Species	Soil EC <sub>se</sub> (dSm <sup>-1</sup> )	
	Saline Threshold	50% Yield Reduction
Bermuda Grass( <i>Cynodondactylon</i> )	6.9	14.7
Rhodes Grass(C.V.Pioneer)( <i>Chloris guyana</i> )	7.0	22.5
Tall Wheat Grass( <i>Thynopyronelongatum</i> )	7.5	19.4
Cotton( <i>Gossypiumhirsutum</i> )	7.7	17.3
Barley( <i>Hordeumvulgare</i> )	8.0	18.0
Vetiver( <i>Vetiveriazizanioides</i> )	8.0	18.0



# Tolerance to high soil acidity

**Vetiver thrives at soil pH=3.8 and Al saturation percentage of 68% and 87% under field conditions**



pH	2.0	2.2	3.8	4.4	4.8	5.5	7.3	7.6
Al%	90	90	68	36	11	2	trace	trace







**Highly erodible acid  
sulfate soil (pH 3.0)  
in coastal Australia**

**One year after planting**



### Threshold levels of heavy metals to vetiver growth as compared with other species

Heavy Metals	Threshold levels in soil (mgKg <sup>-1</sup> )		Threshold levels in plant (mgKg <sup>-1</sup> )	
	Vetiver	Other plants	Vetiver	Other plants
Arsenic	100-250	2.0	21-72	1-10
Cadmium	20-60	1.5	45-48	5-20
Copper	50-10	Not available	13-15	15
Chromium	200-600	Not available	5-18	0.02-0.20
Lead	>1 500	Not available	>78	Not available
Mercury	>6	Not available	>0.12	Not available
Nickel	100	7-10	347	10-30
Selenium	>74	2-14	>11	Not available
Zinc	>750	Not available	880	Not available





## CASE STUDY 1: Fresh coal mine overburden



**Highly erodible alkaline  
and sodic overburden of  
open cut coal mine in  
central Queensland**



**Vetiver planted on contour  
line to conserve soil  
moisture and stabilising  
loose surface materials**





**Eighteen months  
after planting**

**Nine years after  
planting, note the  
return of native trees**





## CASE STUDY 2: Old coal mine overburden



**This coal mine waste rock dump remained barren after 50 years**

**Vetiver planting to stop gully erosion and trapping sediment**




**One year after planting**



# CASE STUDY 3: Coal mine tailings

The tailings was saline, highly sodic, high levels of soluble S, Mg, Ca, Cu, Zn and Fe but extremely low in N and P.

Five salt tolerant species were used: vetiver, marine couch (*Sporobolus virginicus*), common reed grass (*Phragmites australis*), cumbungi (*Typha domingensis*,) and *Sarcocornia* spp.

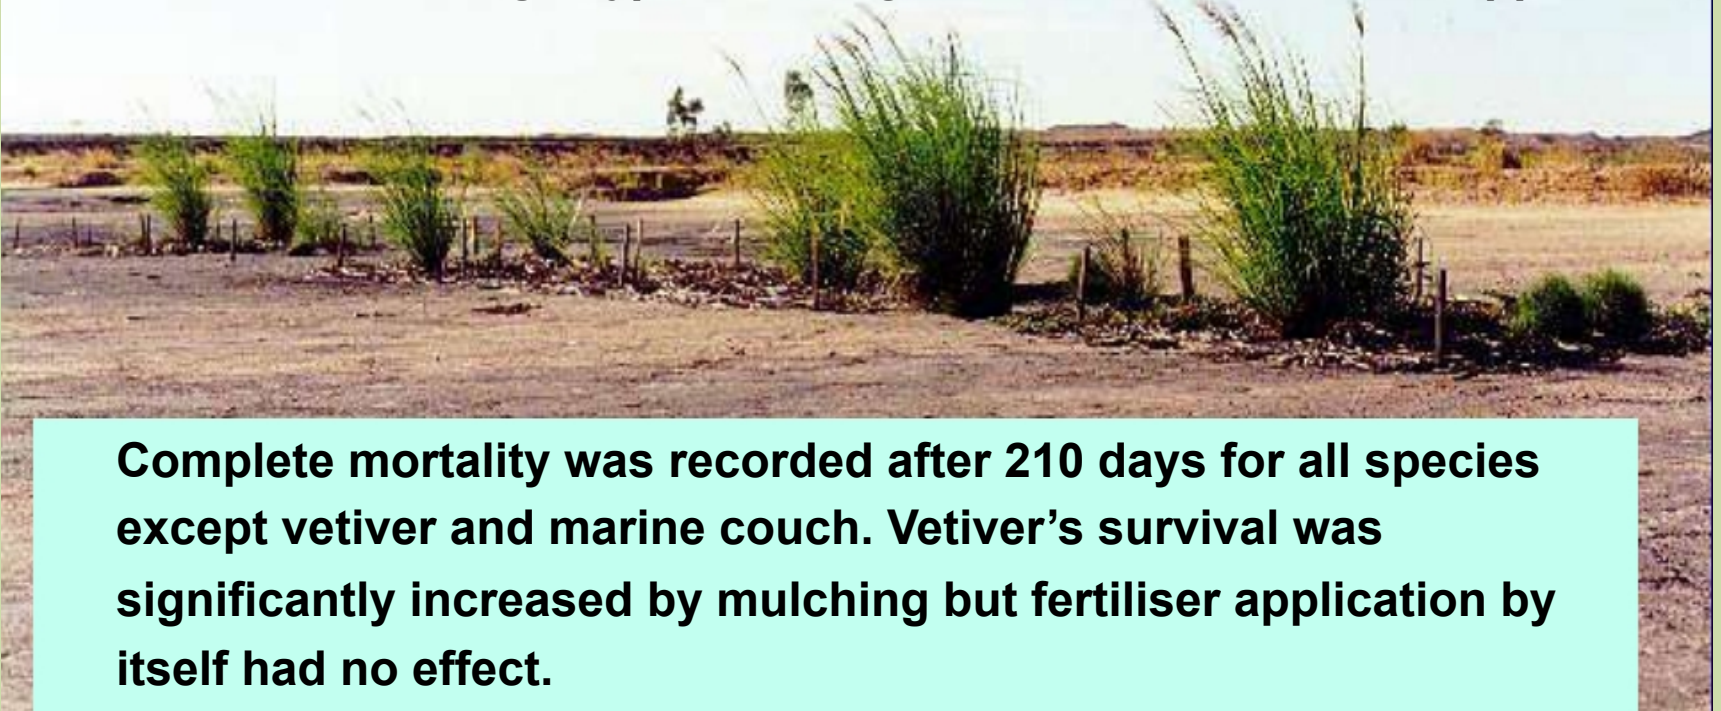

Complete mortality was recorded after 210 days for all species except vetiver and marine couch. Vetiver's survival was significantly increased by mulching but fertiliser application by itself had no effect.





# CASE STUDY 4: Bauxite Redmud tailings




**Old Redmud**

**Three week after planting  
with only N and P fertilizers**



# Fresh Residue Sands: Alcan Alumina processing at Gove, Australia

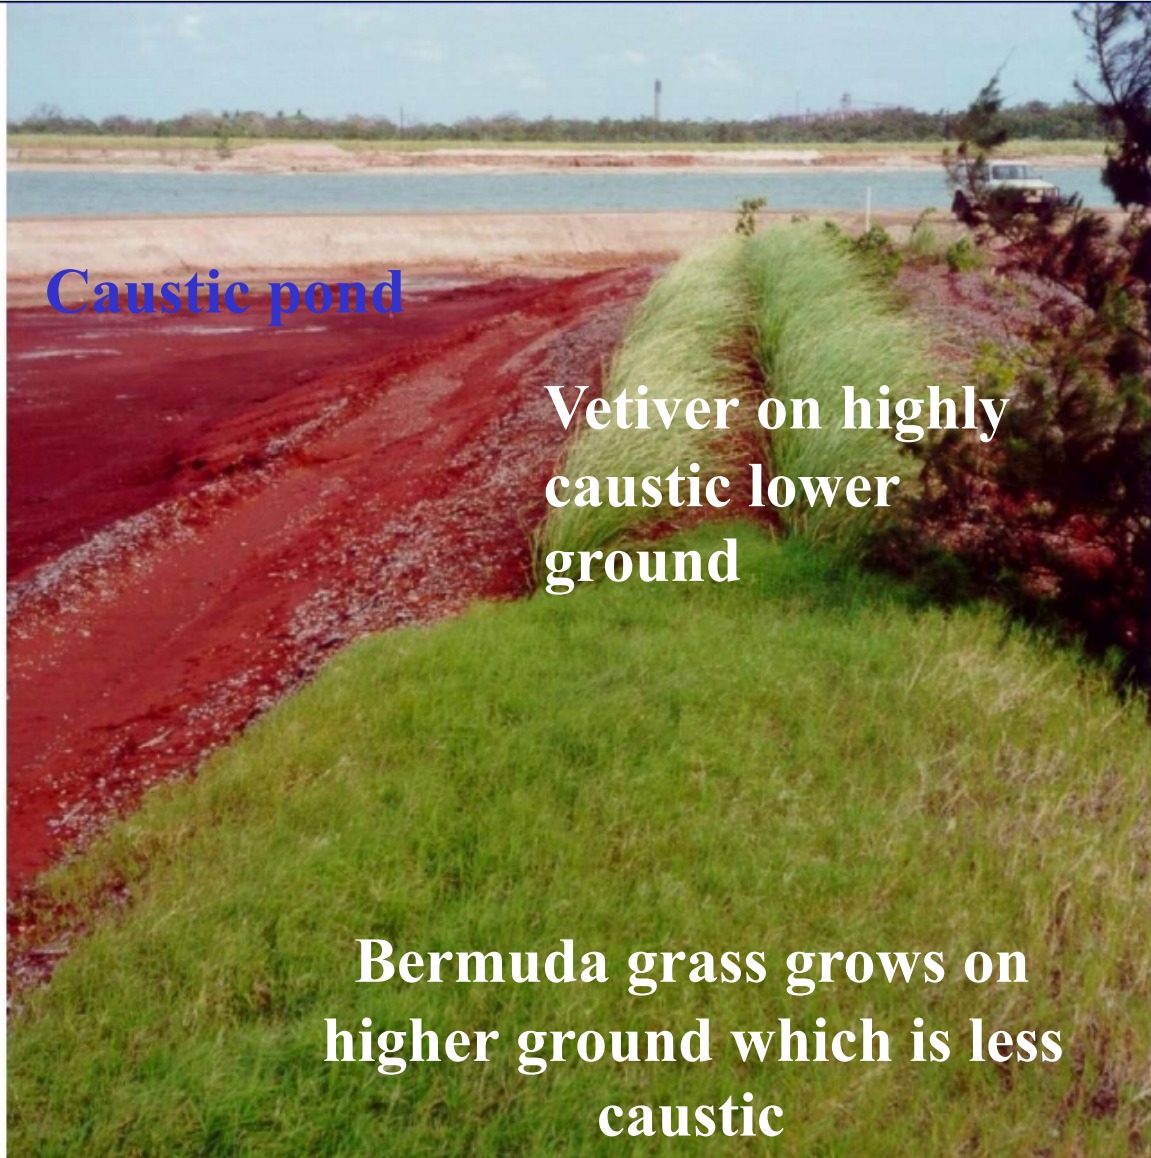

Another by product of Alumina processing is residue sand, which is almost as caustic as red mud

PC: Morell .J






# Old Residue Sands : Alcan Alumina processing at Gove, Australia



**New planting on highly caustic old residue sand**



**Vetiver grew well on residue sand except in some extremely caustic area**

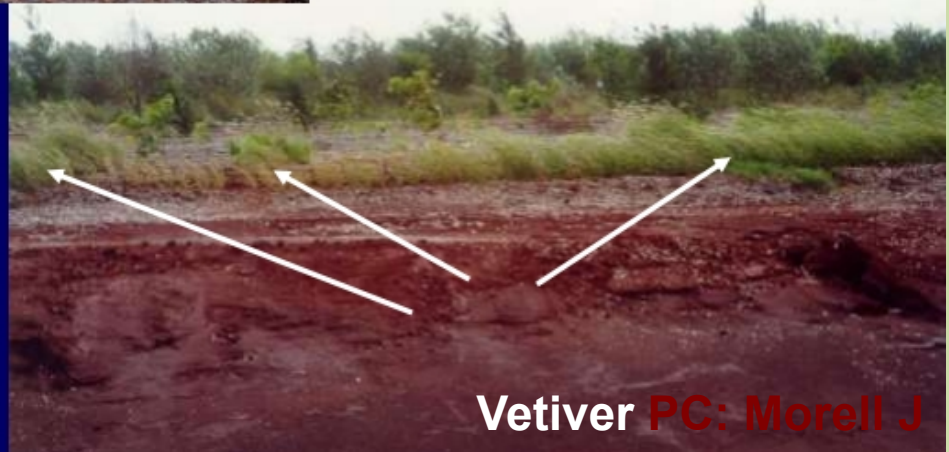

**Vetiver PC: Morell J**



## CASE STUDY 5: Bentonite mine waste dump



**This Bentonite mine tailings dump is barren with an extremely erodible surface which has low water infiltration and high runoff rates.**

**Fourteen months after planting, note the growth of other species**




# Chemical analyses of the Bentonite tailings

Analyses	Overburden	Bentonite tailings
pH	5.4	5.4
EC (mS/cm)	0.18	0.14
Cl (mg/kg)	135.0	47.4
NO3-N (mg/kg)	1.9	0.7
P (mg/kg)	2.0	5.0
SO4-S (mg/kg)	66.0	101.0
Ca (meq/100g)	0.19	0.93
Mg (meq/100g)	4.75	6.44
Na (meq/100g)	2.7	7.19
K (meq/100g)	0.16	0.43
Organic Matter (%)	0.45	0.35
ECEC (meq/100g)	8	15
<b>Exchangeable Sodium %</b>	<b>35</b>	<b>48</b>





# CASE STUDY 6: Old gold tailings dump

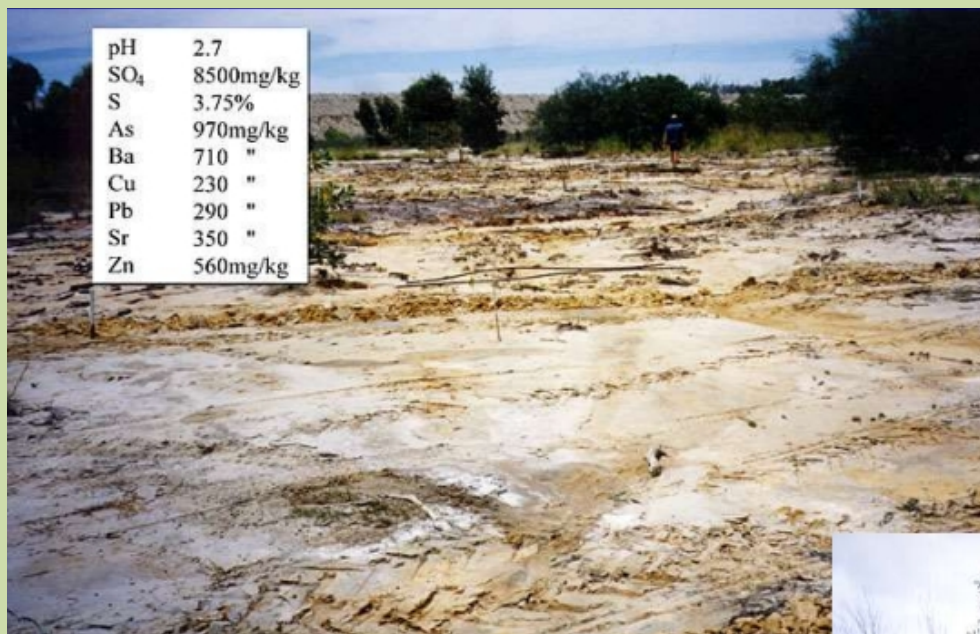

**Kidston mine old gold tailings** : An extremely acidic (pH 2.7, sulfate 8 500mg/kg) gold mine tailings in north Queensland

**Good establishment and growth with lime and fertiliser application on this site**



# CASE STUDY 7: Fresh gold tailings dump



**Kidston mine large  
fresh tailings pond,  
typical of a big gold  
mine**

**Strong wind causes  
dust storm, which is is  
highly contaminated  
with heavy metals such  
as Arsenic, Copper etc**







**Conventional measure  
is to plant a surface  
cover crop and to build  
fences to control wind  
erosion promoting crop  
establishment**



**Despite its very  
Solid construction,  
these rigid and  
expensive fences  
are also vulnerable  
to  
high wind  
velocity**





**The flexible Vetiver hedges provided a low cost and permanent wind barrier unaffected by strong winds, providing excellent protection for crop establishment (2 years after planting)**






**Ten years after  
planting, no  
fertilizers and  
occasional  
grazing**

**Ten years after planting, no  
fertilizers and heavy  
grazing**






## CASE STUDY 8: Pb – Zn tailings rehabilitation in China

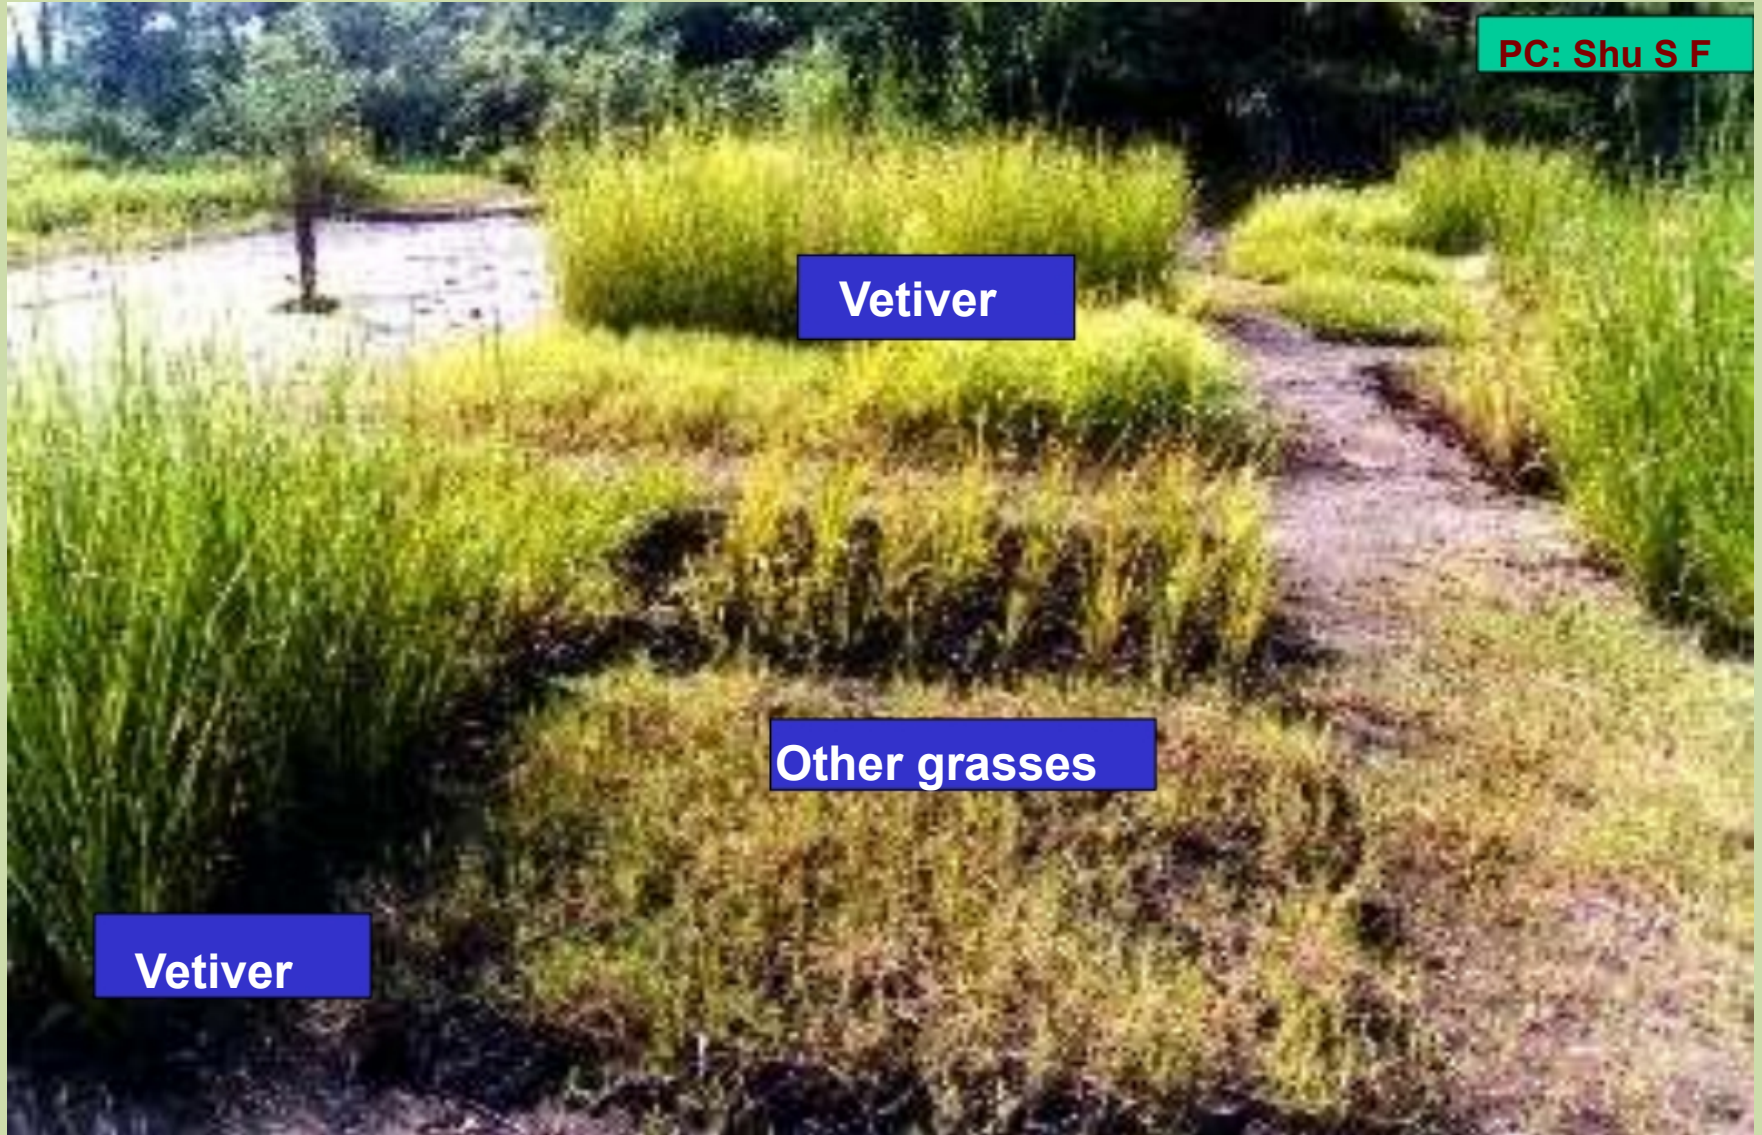



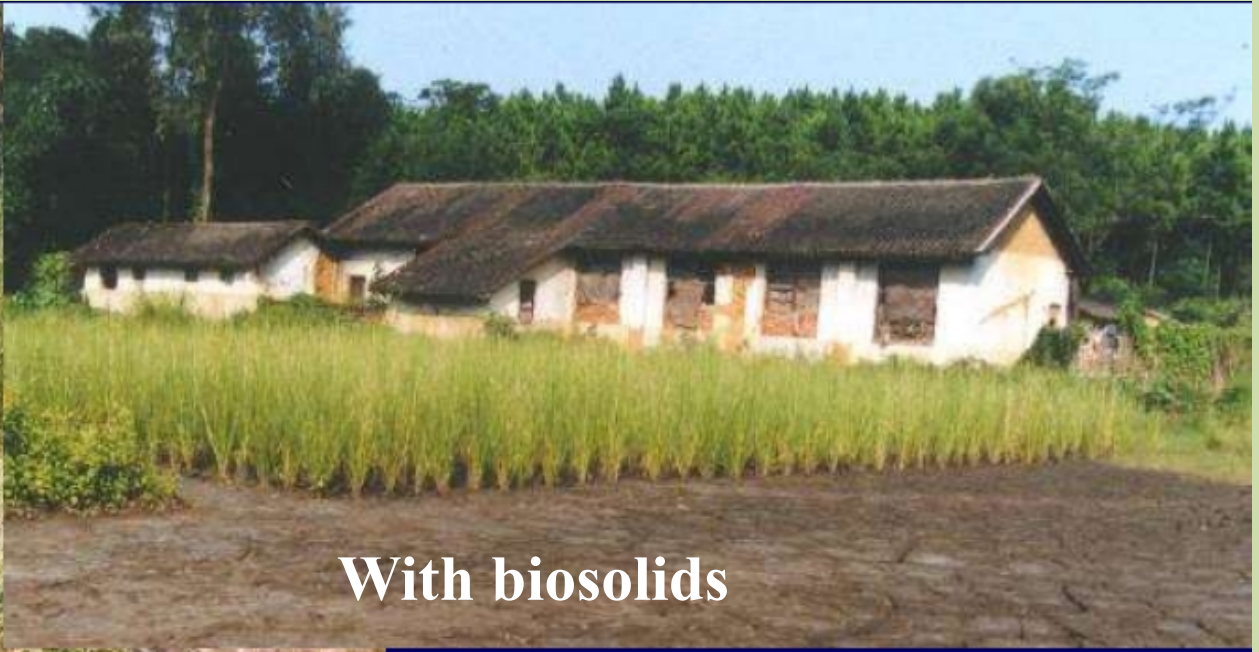

With biosolids





**Research: Vetiver had the highest tolerance and accumulated the lowest concentrations of heavy metals in shoot.**





**Application:** The land around the smelting factory was severely contaminated by heavy metals. Many efforts were failed but Vetiver was well established after 5-months





# CASE STUDY 9: Coal mines in South Kalimantan, Indonesia



PC: D Booth

**VST was successfully used for:**

- \*Rehabilitation of mine tailings slopes**
- \*Stabilizations banks of channels of waste water disposal ditches.**



## CASE STUDY 10: Gold mines in North Sulawesi, Indonesia



**PC: D Booth**

**VST application at  
PT Meares Soputan  
Mining, Toka Tindung  
gold mine site**






# CASE STUDY 11: Iron ore mine in Weat Bengal, India

PC: Pathak



## CASE STUDY 12: Gold mine tailings dam in South Africa

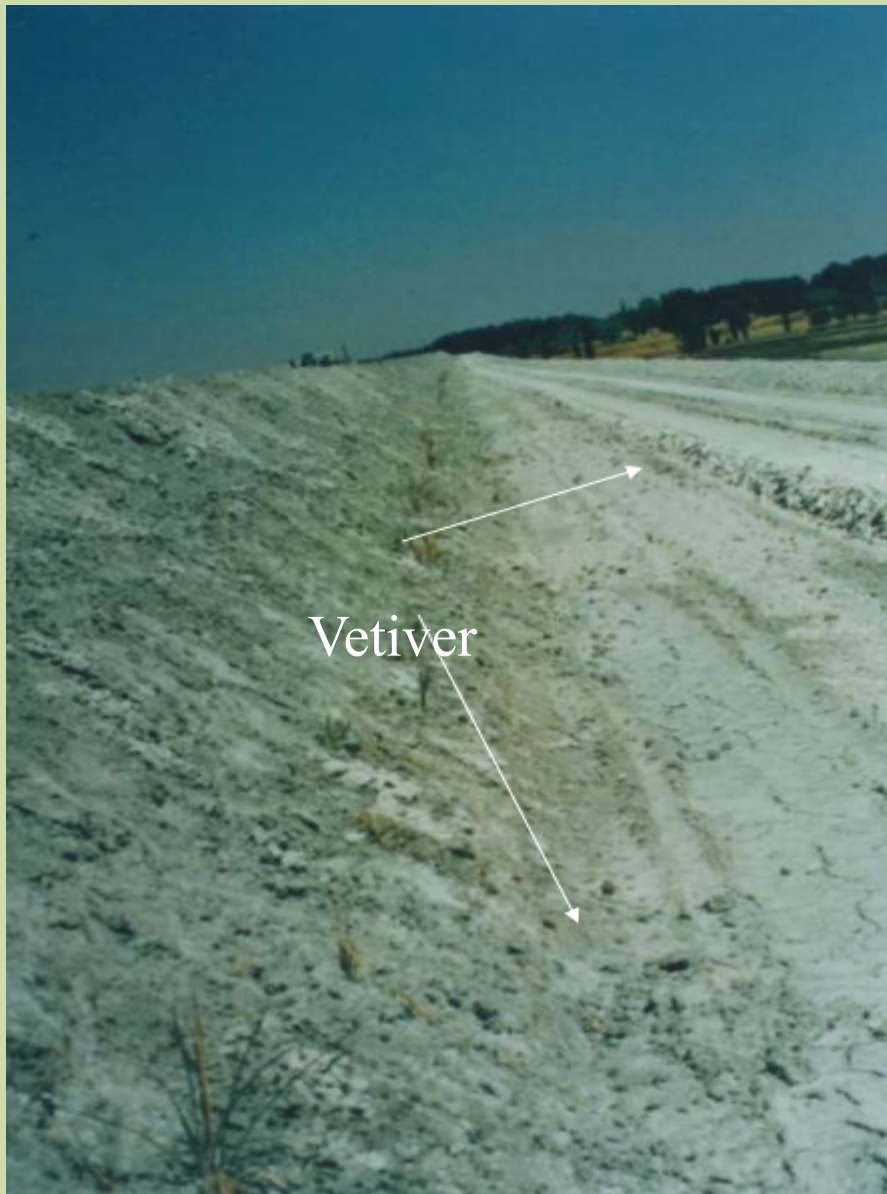



## Same tailings dam wall, 3 year later





## **The Rio Tinto- Simandou, Guinea**



## **Anglo America Ashanti Gold Mine in Guinea, West Africa.**



**Vetiver grass slips  
planted in contour furrows  
and hydromulched at  
Anglo Ashanti Gold, Ghana**





# Ambatovy Project, Moramanga to Tamatave, Madagascar



- Length of rows: 220 km
- Area rehabilitated: 550ha
- Rehabilitation period: 3 years
- Vetiver plants & fascines sourced from local communities





# Xstrata Chromium Mine, Rustenburg, South Africa





**Vetiver planted in rows 1 meter apart at intervals of 250mm. Areas between rows of Vetiver scarified and hydroseeded with native grass species**

**Vetiver turned brown due to winter frost, will regrow in spring**





# CASE STUDY 13: Open cut Bauxite Mining at Los Pijiguaos, Venezuela (pH 4-5; Rainfall 2 400-2 900mm/y)





**Fill slope**



**Cut slope**



**Drainage channel**



**Dam wall**




# **SUMMARY**

## **The Advantages of Using the Vetiver System for Mine Rehabilitation**

- 1. Containment: Erosion and sediment control of waste rock dump and infrastructure**
- 2. Clean Up: Control/reducing the contaminated materials from spreading to the environment by phytoremediation**
- 3. VST is natural: no secondary by-products are produced and can be grazed by livestock.**





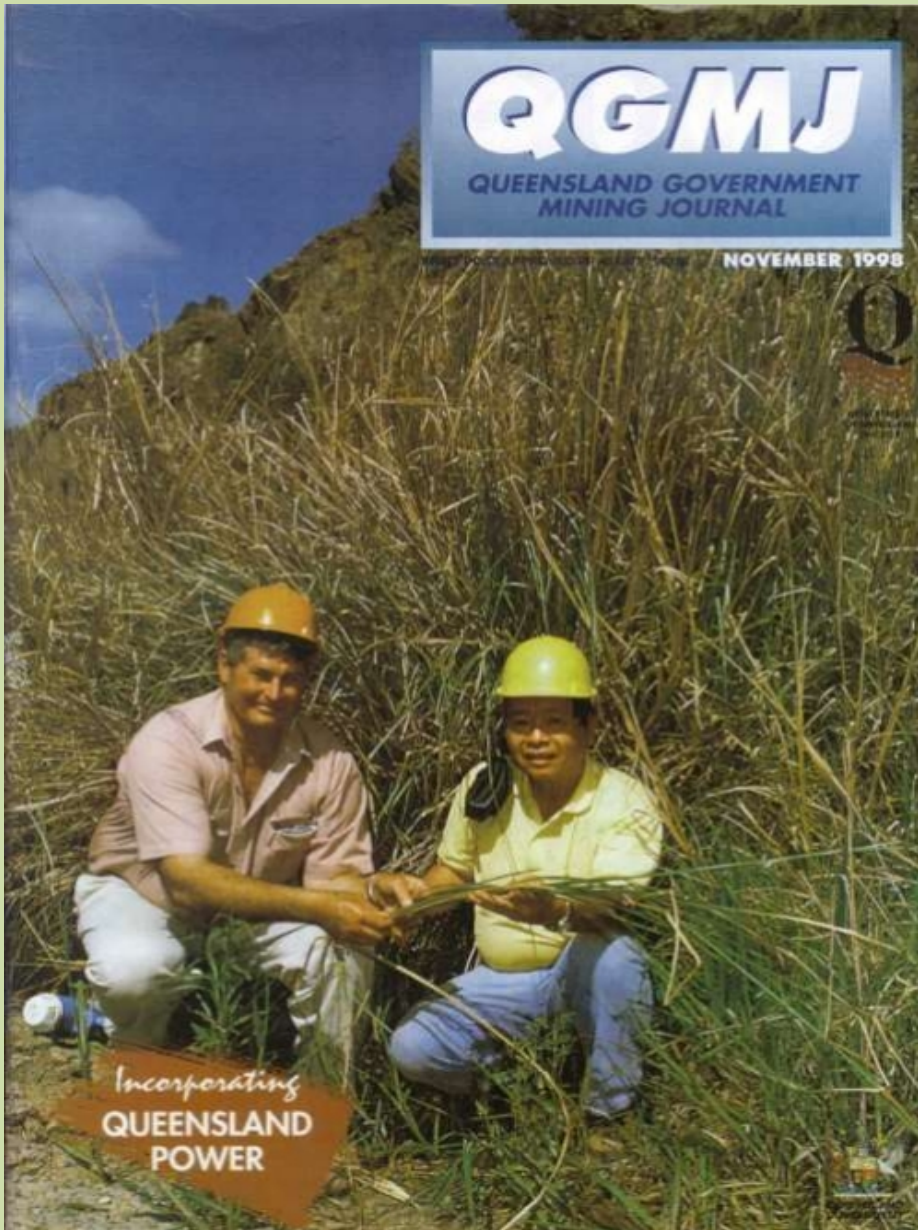

## Queensland Government Mining Journal

**Queensland is one of the largest mining states of Australia, its Department of Mineral and Energy recommended VST for mine and quarry rehabilitation in the state.**

